


EP-360C Micro panel printer

User Manual

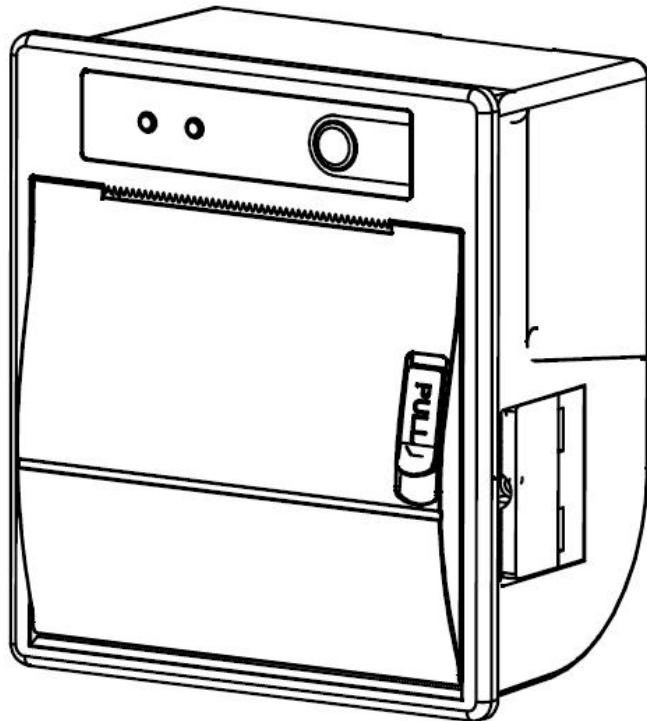

Protocol: Lin Xiaopeng 2017.04.06

Audit: Hu Riyu 2017.04.08

Standardize: Liu Zhonghua 2017.04.09

Authorize: Wang Huanyong 2017.04.10

Company: Xiamen Cashino Technology Co., Ltd.

Tel: 0592-5517253 **Fax:** 0592-5231815

Address: 4/F, No.318, Tongji South Road, Jimei District, Xiamen, China. 361021

The manual is subject to change without further notice. Please contact Xiamen Cashino Technology Co., Ltd. directly for the latest

R e v i s i o n R e c o r d

No.	Date	Modify the content	Change the Page number	Prepared by	Review
1	20170406	First draft		LIN XIAOPEN G	HU RIYU
2	20180409	Product specification	5	ZHU CHUNYAN	HU RIYU
3	20180418	Add Fixing a jammed cutter	11	ZHU CHUNYAN	HU RIYU
4	20180523	Modify Installation port size	5	ZHU CHUNYAN	HU RIYU
5	20180621	Modify LED light status	8	ZHU CHUNYAN	HU RIYU

Content

Content.....	3
1.Overview.....	5
1.1 Production feature.....	5
1.2 Specification.....	5
1.3 Appearance and dimension.....	6
1.3.1 Appearance.....	6
1.3.2 Dimension.....	6
2.Connector pin specification.....	7
3.Basic Operation.....	8
3.1 Print self-test page.....	8
3.2 Control Panel.....	8
3.3 Printer Installation.....	9
3.4 Paper Loading.....	11
3.5 Cuter test.....	11
3.6 Fixing a jammed cutter.....	11
4.Command Instruction.....	11
4.1 Command List.....	11
4.2 Commands details.....	12
①Commands details.....	12
Printing and paper feed.....	12
Enter.....	12
Print and paper feed dots.....	12
Print and paper feed n line.....	13
②print set commands.....	13
Character right space setting.....	13
Set line space to default.....	13
Set print position.....	14
Set the left margin.....	14
Set character printing method.....	15
Set character size.....	15
Set remove white printing.....	16
Set remove underline.....	17
Set remove 90°revolving printing.....	17
Set printing alignment.....	18
Set Chinese mode.....	18
Exit Chinese character mode.....	19
Select cancel user customized characters.....	19
Define user customized characters.....	19
Cancel user customized characters.....	21

Selecting international character set.....	22
Select character code.....	22
③Graphic printing command.....	24
Fill Graphics vertical module data.....	24
Print Graphics horizontal module data.....	25
Define downloaded bitmap.....	26
Print downloaded bitmap.....	27
Define NV bitmap.....	28
Print NV bitmap.....	31
④Tab Commands.....	32
Horizontal tab.....	32
Horizontal tab position setting.....	32
⑤One-dimension bar code command.....	33
1D bar code readable character(HRI) print position setting.....	33
1D bar code height setting.....	33
Name.....	33
1D bar code width setting.....	34
1D bar code printing.....	34
⑥ Printing QR code.....	39
Mode type of 2-D bar code.....	39
Setting error correction level of 2-D bar code.....	39
Store 2-D bar code data to data buffer.....	40
Printing two-dimension bar code.....	40
Setting two-dimension bar code graph information.....	41
Printing double Two-dimension bar code.....	42
⑦Status querying Commands.....	42
Real-time transmission status.....	42
⑧Other commands.....	44
Printer reset.....	44
Print self-test page.....	45
paper cut.....	45
Full cut.....	46
Partial cut.....	46

1. Overview

This is a panel thermal printer with cutter which is light,durable.It can keeps long time to print.It is widely used in medical equipment,measure equipment,safety equipment ,Analytical instruments,instruments and so on.

1.1 Production feature

- ※ Smart appearance
- ※ easy loading paper
- ※ Low noise thermal printing
- ※ Different interfaces as choose
- ※ Front panel make paper replacement easily
- ※ Support Graphic print
- ※ Support 60mm diameters paper
- ※ Easily embedded to any kinds of instruments and meters


1.2 Specification

Printing	Print method	Thermal line printing		
	Print speed	150mm/s		
	Resolution	203dpi(8dots/mm)		
	Effective printing width	72mm		
Character	Character set	ASCII 码, GB2312-80 (Chinese) ,BIG-5		
	Font	ANK: 9×17, 12×24; Chinese: 24×24		
	Printable characters per line	Font A:48;Font B:64		
Paper spec.	Paper type	Thermal paper		
	Paper width	79.5±0.5mm		
	Paper diameter	max: 60mm; min:13mm		
	Paper Thickness	60-85 μ m		
Reliability	MCFB	>100km		
	Auto cutter	>1 million cuts		
interface	Serial(RS-232,TTL), USB, Cash box (option)			
	Cutter method	Full cut+partial cut		
Power (adapter)	Outline Dimension (WxLxH)	≥24V (rated current)	≥4A (Inrush current)	
Physical	Installation port size(WxL)	122*115.5*66mm		
	Insert Depth	56mm		
	Color	White/Black		
	Operating temperature	0°C~50°C		
Environmental conditions	Operating humidity	20%~85%RH		
	Storage temperature	-20°C~60°C		


Storage humidity	5%~90%RH
------------------	----------

1.3 Appearance and dimension


1.3.1 Appearance

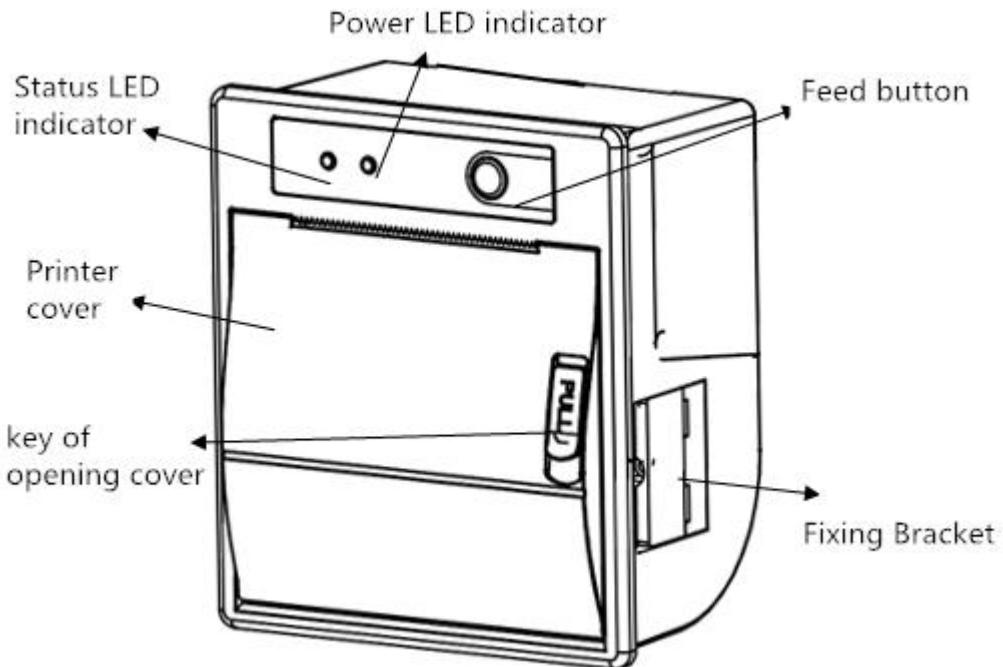

1.3.2 Dimension

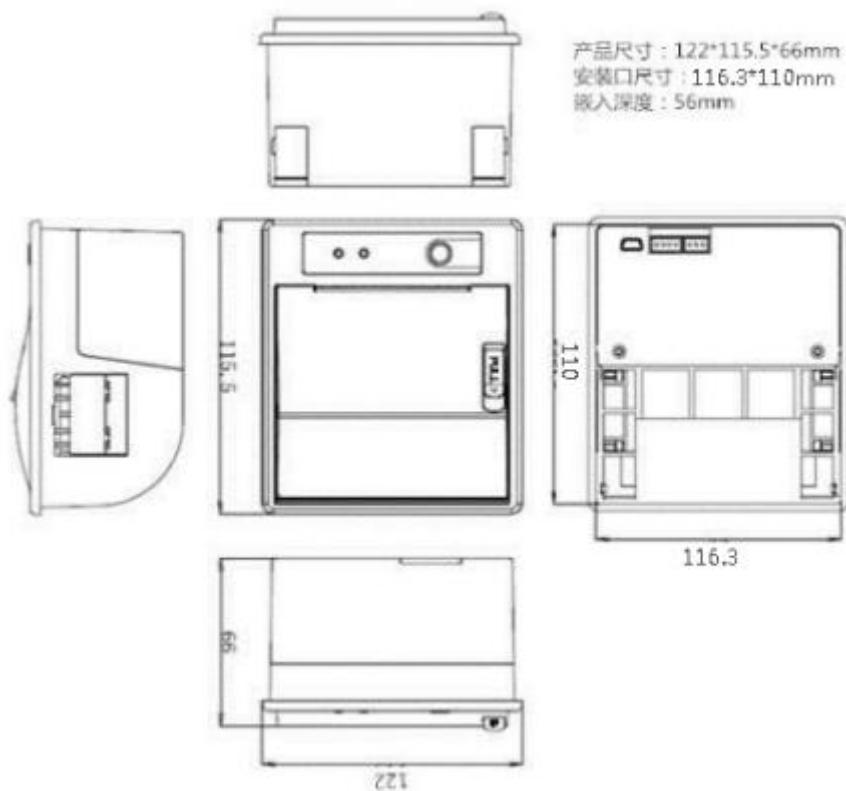

2. Connector pin specification

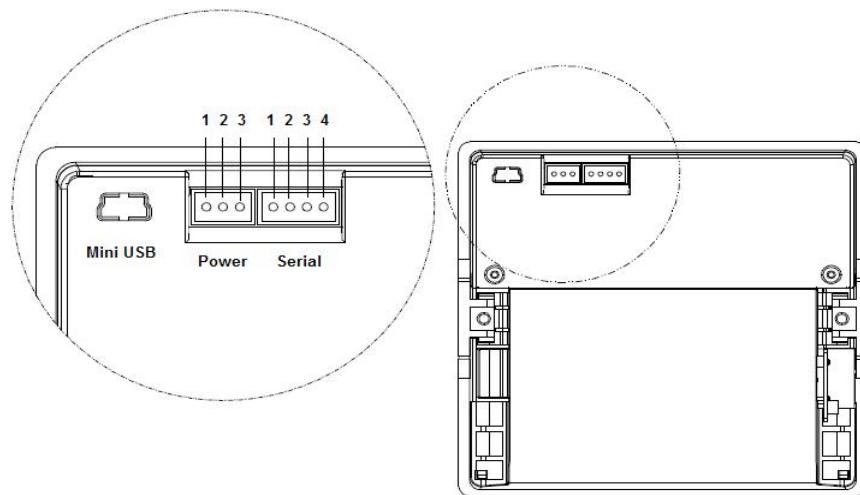

Serial (RS232/TTL) XH4/2.54mm

Terminal No.	Signal Name	Description
1	DTR	Request to send (Data terminal ready)
2	TXD	Transmission data
3	RXD	Receive data
4	GND	Ground

Power XH02/2.54mm

Terminal No.	Signal Name	Description
1	GND	Ground
3	VH	Power supply

MiniUSB


Terminal No.	Signal Name	Description
1	VUSB	+5v power supply
2	D-	Differential Data Input/Output D-
3	D+	Differential Data Input/Output D+
4	GND	Ground

3. Basic Operation

3.1 Print self-test page

Turn the power off while holding the feed button depressed. Then turn the power on, a self-test receipt will be printed out. It includes baud rate, language and other some information.

3.2 Control Panel

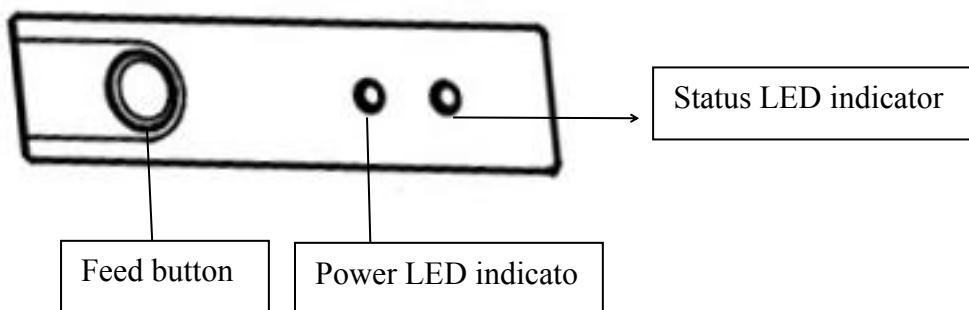

1. 【Feed button】

When this push-button switch is pressed once briefly (for 0.5 seconds or less), the paper is fed forward by one line. When it is held down continuously, the paper is fed forward continuously until the switch is released.

2. 【Power LED indicator】 and 【Status LED indicator】

Power light indicates power well connected. Power light off indicates power off.

When the printer is out of paper, cutter error, print head overheating and so on, the status lights flashing, such as the following table


POWER indicator	STATUS indicator	Printer status
Light	Light off	Normal
Light	Flash 2 times	Printer head is not connected or the temperature is too low
Light	Flash 3 times	Out of paper
Light	Flash 4 times	Cutter error
Light	Flash 5 times	Printer head overheating
Light	Flash 6 times	Paper roll is not loaded properly

3.3 Printer Installation





开孔尺寸: 116.3*110

Step 1.Embed the printer into panel

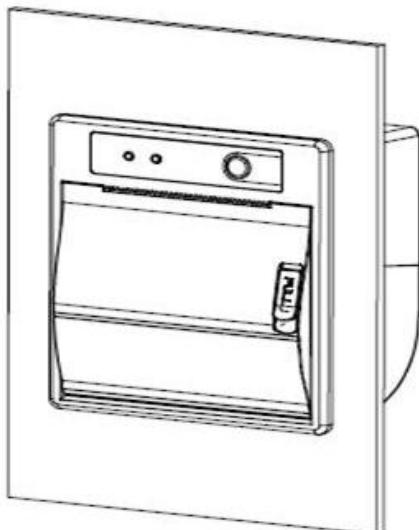


Step 2:Turn the printer cover and turn the screws on both sides clockwise until the screws are locked so that the product is fixed OK

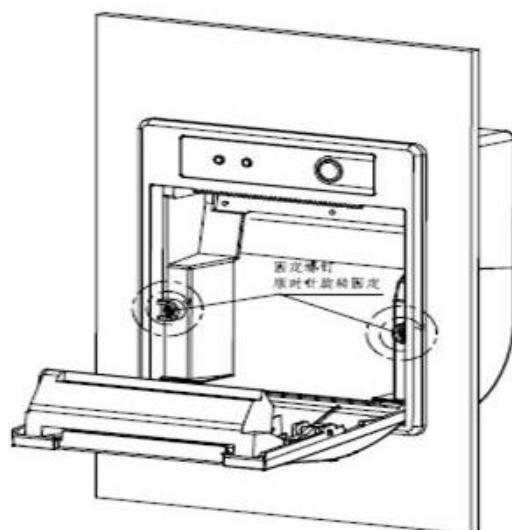

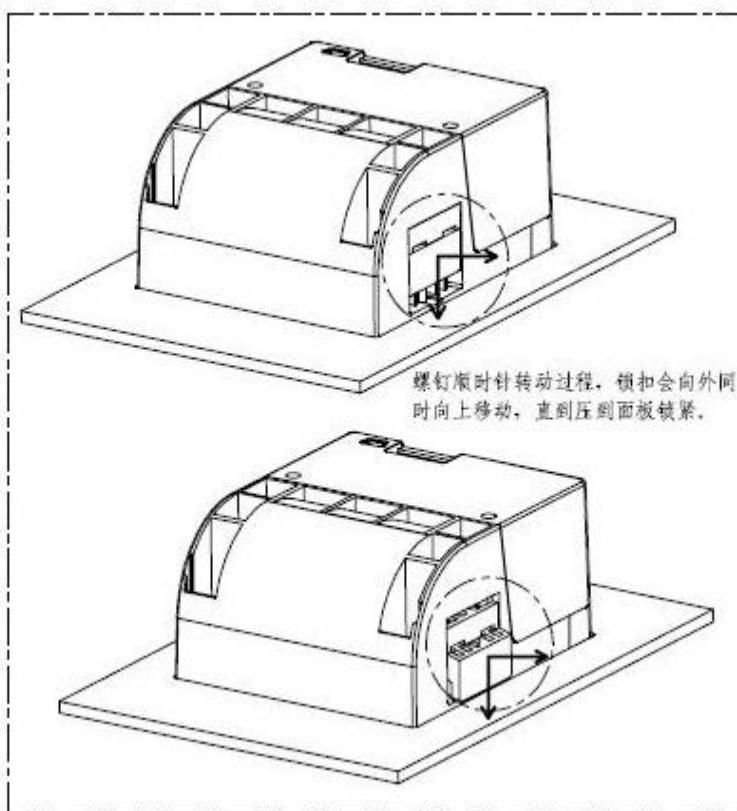

Noted: Screw clockwise rotation process, the lock will move outward at the same time upward, until the panel is pressed to lock tight.

Step 3: Close printer cover and it's ok

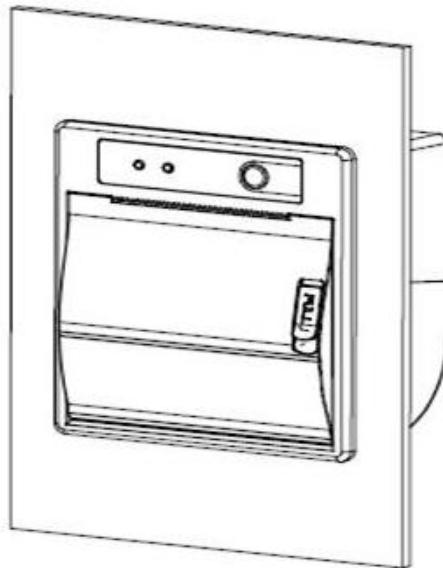

3.4 Paper Loading

- 1.Open the printer cover;
- 2.The paper roll is put up on the reverse;
- 3.Close the printer cover.

3.5 Cuter test

Cutting period: More than a 3sec/cut

3.6 Fixing a jammed cutter

Owing to the paper jammed, if the cutter has been locked during paper cutting,power off the printer and then power on.Printer work well

If above method doesn't work,pls use another method.Pulling the key of opening cover many times until you can open the cover

4. Command Instruction

4.1 Command List

LF	Line feed	print and paper feed commands
CR	Enter	
ESC J	Print and paper feed n dots	
ESC d	Print and paper feed n lines	
ESC 3	Set line space n dots	
ESC 2	Set default line space	print set commands
ESC \$ nL nH	Set absolute print position	
GS L nL nH	Set left margin amount	
ESC !	Set character printing method	
GS ! n	Set character size	
GS B n	Set and delete white printing	
ESC - n	Set and delete underline	
ESC V n	Set and delete 90°rotate printing	
ESC a	Setting position alignment mode	
FS &	Set Chinese character mode	
FS .	Delete Chinese character mode	
ESC % n	Choose and delete customized characters	Graphic printing command
ESC &	Define customized characters	
ESC ? n	Delete customized character	
ESC R n	International character sets	
ESC t n	Select the character code page	
ESC *	Bitmap vertical modulus data fillings	
GS v 0	Bitmap horizontal modulus data print	
GS *	Define download bitmap	
GS / m	Print download bitmap	
FS q	Define NV bitmap	
FS p n m	Print NV bitmap	

HT	Horizontal tab	Tab Commands
ESC D	Set horizontal tabulation position	
GS H	Set 1-D barcode readable character(HR I) print position	1-D barcode printing commands
GS h	Set 1-D barcode height	
GS w	Set 1-D barcode width	
GS k	1-D barcode	QR CODE command
GS (k	2-D barcode print	
US Q m n	Print double QR CODE	
GS r n	Transmission status	status commands
DLE EOT n	Real-time transmission status	
ESC @	Printer reset	other commands
DC2 T	Printing self-test page	

4.2 Commands details

①Commands details

Printing and paper feed

Name	print and paper feed
Code	ASCII : LF DEC : 10 HEX : 0A
Function	Print the buffer content, and set the paper feed as per line space, then adjust print position to initial position at the next line.
Range	None
Default	None
Notes	None
Example	None

Enter

Name	Enter
Code	ASCII : CR DEC : 13 HEX : 0D
Function	Adjust print position to initial position of the same line.
Range	None
Default	None
Notes	After executing, R command, the new printing data will cover old data in the printing buffer.
Example	None

Print and paper feed n dots

Name	Print and paper feed n dots
------	-----------------------------

Code	ASCII : ESC J n DEC : 27 74 n HEX : 1B 4A n
Function	Print the buffer content and paper feed
Range	0 ≤ n ≤ 255
Default	None
Notes	Paper feed n dots when printing buffer is empty. After executing this command, printing position is moved to initial
Example	1b 40 30 31 32 1b 4a 10

Print and paper feed n line

Name	Print and paper feed n lines
Code	ASCII : ESC d n DEC : 27 100 n HEX : 1B 64 n
Function	Print the contents in printing buffer and paper feed n lines.
Range	0 ≤ n ≤ 255
Default	None
Notes	Print this command set as initial position of the same line
Example	1b 40 30 31 32 1b 64 01

②print set commands

Character right space setting

Name	Character right space setting
Code	ASCII : ESC SP n DEC : 27 32 n HEX : 1B 20 n
Function	Character right space setting as (n*0.125mm)
Range	0 ≤ n ≤ 255
Default	n = 0
Notes	When characters double width, Character right space is twice of normal. When characters amplified, Character right space is n times of normal. This command doesn't affect the setting of Chinese characters. This command sets the standard values independently in each mode.
Example	None

Set line space to default


Name	Set line space to default
Code	ASCII : ESC 2 DEC : 27 50 HEX : 1B 32
Function	Set line space to default 30 dots

Range	None
Default	None
Notes	<p>Line space in details pls check ESC 3 command.</p> <p>If the line space setted is less than the height character in the line, the line space of this line is equal to the height of the highest character</p> <p>It can use ESC 3 to define line space.</p>
Example	None

Set print position

Name	Set print position
Code	ASCII : ESC \$ nL nH DEC : 27 36 nL nH HEX : 1B 24 nL nH
Function	Set left side blank area as $(nL + nH \times 256)$ dots
Range	$0 \leq nL \leq 255$ $0 \leq nH \leq 255$
Default	None
Notes	<p>Set left side blank area as $[(nL+nH*256)]*0.125mm]$</p> <p>This command is only effective with the initial position of the line.</p> <p>This command is unavailable if it sets beyond the printing area.</p>
Example	None

Set the left margin

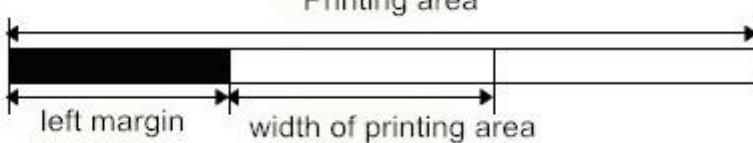Name	Set the left margin
Code	ASCII : GS L nL nH DEC : 29 76 nL nH HEX : 1D 4C nL nH
Function	Set the left margin as $(nL + nH \times 256)$ dots
Range	$0 \leq nL \leq 255, 0 \leq nH \leq 255$
Default	None
Support Model	All
Notes	<p>This command is only effective with the initial position of the line.</p> <p>The illustration is as follows:</p>  <p>Use the maximum value of the printable unit, if the setting is beyond the printable area.</p>
Example	1b 40 1d 4c 08 00 30 31 32 0d 0a 30 31 32 0d 0a

Set character printing method

Name	Set character printing method																												
Code	ASCII : ESC ! n DEC : 27 33 n HEX : 1B 21 n																												
Function	<p>Set character printing methods (font,highlight,inversion,bold,double height,double width and underline),parameter n bit definition as below:</p> <table> <thead> <tr> <th>Bit Function</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1</td> </tr> <tr> <td>0 Font</td> <td>Normal</td> <td>Small character</td> </tr> <tr> <td>1 Undefined</td> <td></td> <td></td> </tr> <tr> <td>2 Undefined</td> <td></td> <td></td> </tr> <tr> <td>3 Bold</td> <td>Cancel</td> <td>Setting</td> </tr> <tr> <td>4 Double hight</td> <td>Cancel</td> <td>Setting</td> </tr> <tr> <td>5 Double width</td> <td>Cancel</td> <td>Setting</td> </tr> <tr> <td>6 Undefined</td> <td></td> <td></td> </tr> <tr> <td>7 Underline</td> <td>Cancel</td> <td>Setting</td> </tr> </tbody> </table>	Bit Function	Value	0	1	0 Font	Normal	Small character	1 Undefined			2 Undefined			3 Bold	Cancel	Setting	4 Double hight	Cancel	Setting	5 Double width	Cancel	Setting	6 Undefined			7 Underline	Cancel	Setting
Bit Function	Value																												
0	1																												
0 Font	Normal	Small character																											
1 Undefined																													
2 Undefined																													
3 Bold	Cancel	Setting																											
4 Double hight	Cancel	Setting																											
5 Double width	Cancel	Setting																											
6 Undefined																													
7 Underline	Cancel	Setting																											
Range	None																												
Default	n = 0																												
Notes	The command is effective with Chinese and foreign languages. The command is disabled when ESC@, printer reset or power off																												
Example	<pre>1B 40 1B 21 01 30 31 32 0D 0A 1B 40 1B 21 02 30 31 32 0D 0A 1B 40 1B 21 04 30 31 32 0D 0A 1B 40 1B 21 08 30 31 32 0D 0A 1B 40 1B 21 10 30 31 32 0D 0A 1B 40 1B 21 20 30 31 32 0D 0A 1B 40 1B 21 40 30 31 32 0D 0A 1B 40 1B 21 80 30 31 32 0D 0A</pre>																												

Set character size

Name	Set character size
Code	ASCII : GS ! n DEC : 29 33 n HEX : 1d 21 n

Function	Set character size as 1-8 times width, 1-8 times height. Definition is as below: Use 0-3 set character height 4 - 7 bits set character width show as below:		
	Chart 1 Character width setting		Chart 2 Character height setting
	HE X	DEC	width
	00	0	1(Normal)
	10	16	2(double width)
	20	32	3
	30	48	4
	40	64	5
	50	80	6
Range	None		
Default	n = 0		
Notes	This command is effective with Chinese and other foreign languages, except for HRI character. The command setting is disable when ESC@, printer reset or power off.		
Example	1b 40 1d 21 11 30 31 32 0d 0a 30 31 32 0d 0a		

Set remove white printing

Name	Set remove white printing
Code	ASCII : GS B n DEC : 29 66 n HEX : 1d 42 n
Function	Set and remove white printing When the LSB of n is 0, white printing mode is off. When the LSB of n is 1, white printing mode is on.
Range	None
Default	n = 0
Notes	It is only effective for LSB of n. This command is all effective with built-in characters and user-defined characters. It is effective with blank, which is set by ESC CP, when white printing mode is on. This command is not effective with bitmap, user-defined bitmap, barcode, HRI character and vaulting space of HT, ESC \$.

	<p>This command is not effective with line space. The white printing mode is prior to underline mode. When it is white printing mode, even underline mode is open, which can also be forbidden.(But it not be canceled). This command is disabled when ESC@, printer reset or power off.</p>
Example	<pre>1b 40 1d 42 01 30 31 32 0d 0a 30 31 32 0d 0a</pre>

Set remove underline

Name	Set remove underline								
Code	ASCII : ESC - n DEC : 27 45 n HEX : 1B 2D n								
Function	Set / remove underline mode,based on the value of n as follow: <table border="1"> <tr> <th>n</th> <th>Functions</th> </tr> <tr> <td>0, 48</td> <td>Remove underline mode</td> </tr> <tr> <td>1, 49</td> <td>Set underline mode(1 dot coarse)</td> </tr> <tr> <td>2, 50</td> <td>Set underline mode(2 dot coarse)</td> </tr> </table>	n	Functions	0, 48	Remove underline mode	1, 49	Set underline mode(1 dot coarse)	2, 50	Set underline mode(2 dot coarse)
n	Functions								
0, 48	Remove underline mode								
1, 49	Set underline mode(1 dot coarse)								
2, 50	Set underline mode(2 dot coarse)								
Range	0 ≤ n ≤ 2, 48 ≤ n ≤ 50								
Default	n = 0								
Notes	Printer can print underline for all characters(including the space to the right of the character), except for the space set by HT. Printer can not print underline for clockwise rotated 90 ° characters and white printing characters. When n is setted as 0 or 48,remove underline mode.Other data is not printed as underline,and the setted underline coarseness does not change before removing underline mode.The default underline coarseness is 1 dot. It is not effective with underline coarseness to change character size. Using ESC! can also set and remove underline mode.However be aware that the last received command must be effective.								
Example	<pre>1b 40 1b 2d 01 30 31 32 0d 0a 1b 40 1b 2d 02 30 31 32 0d 0a 1b 40 1b 2d 00 30 31 32 0d 0a</pre>								

Set remove 90°revolving printing

Name	Set remove 90°revolving printing
Code	ASCII : ESC V n DEC : 27 86 n HEX : 1B 56 n
Function	Set or remove 90° revolving printing

	When n is equal to 0 or 48,remove 90°revolving printing. When n is equal to 1 or 49,set 90°revolving printing.
Range	$0 \leq n \leq 1, 48 \leq n \leq 49$
Default	n = 0
Support Model	All
Notes	When it is setted to underline mode, the printer is not underlined for characters rotated 90°. In the 90° rotation mode, the multiplier and double width commands magnify the character in the opposite direction to the multiplier command in the normal mode. When ESC @, printer reset, power off, the setting of this instruction is invalid.
Example	1b 40 1b 56 01 30 31 32 0d 0a 30 31 32 0d 0a

Set printing alignment

Name	Set print alignment (Left, middle, right)
Code	ASCII : ESC a n DEC : 27 97 n HEX : 1B 61 n
Function	Align all data in one line,the meaning of n value as below: n mode 0, 48 left 1, 49 middle 2, 50 right
Range	$0 \leq n \leq 2$ or $48 \leq n \leq 50$
Default	n = 0
Notes	This command setting is disabled when ESC@,printer resets or power off.
Example	1B 40 1B 61 02 30 31 32 0D 0A 1B 40 1B 61 01 30 31 32 0D 0A 1B 40 1B 61 00 30 31 32 0D 0A

Set Chinese mode

Name	Set Chinese mode
Code	ASCII : FS & DEC : 28 38 HEX : 1C 26
Function	Set Chinese mode
Range	None
Default	None

Notes	When the Chinese character mode is selected, the printer processes all Chinese character codes(ASCII code) , two bytes at a time. The Chinese character code(ASCII code) is processed in the order of the first byte and the second byte.
Example	1b 40 1C 26 B0 AE C9 CF D7 D4 BC BA 0d 0a 1C 2E B0 AE C9 CF D7 D4 BC BA 0d 0a

Exit Chinese character mode

Name	Exit Chinese character mode
Code	ASCII : FS . DEC : 28 46 HEX : 1C 2E
Function	Exit Chinese character mode, cancel Chinese character mode
Range	None
Default	None
Notes	None
Example	None




Select cancel user customized characters

Name	Select cancel user customized characters
Code	ASCII : ESC % n DEC : 27 37 n HEX : 1B 25 n
Function	Select , cancel user customized characters When n LSB is 0, delete customized characters When n LSB is 1, select customized characters
Range	0 ≤ n ≤ 255
Default	0
Notes	When cancel customized characters, automatically select the internal character set.
Example	None

Define user customized characters

Name	Define user customized characters
Code	ASCII : ESC & y c1 c2 [x1 d1 ... d(yx1)] ... [xk d1 ... d(y x k)] DEC : 27 38 y c1 c2 [x1 d1 ... d(yx1)] ...[xk d1 ... d(yxk)] HEX : 1B 26 y c1 c2 [x1 d1...d(y x1)]...[xk d1...d(yxk)]
Function	Define user customized characters. y specifies vertical direction bytes. c1 specifies the starting character encoding,c2 specifies the ending character encoding xk specifies horizontal direction dots.
Range	The range of x 、 y, are correspond with internal fonts.

	<p>If choosing Font 6*12, $y = 2$, $0 \leq x \leq 6$ If choosing Font 12*24, $y= 3$, $0 \leq x \leq 12$ $32 \leq c1 \leq c2 \leq 126$ $0 \leq d1 \dots d(y*xk) \leq 255$</p>
Default	None
Notes	<p>Definable character code range:from<20>H to <7E>H ASCII code(95 characters). It can define continuous characters encoding for several characters. When it need one character only,make $c1=c2$. d is character's dot data,dot mode starts from left side in the horizontal direction.It is blank for the rest dots in the right side. Defined user defines characters data is $(y*x)$ byte. Set corresponding bit of printing dots as 1, or corresponding bit of no printing dots as 0. This command defines different customized characters for each type of font. Set font with ESC !. Customized characters and downlink bitmaps cannot be defined at the same time. When the command is executed, the downlink bitmap is cleared. User Customized characters will be cleared in these situations: Execute ESC @. Execute GS *. Execute ESC ?. Printer reset or power off</p> <p>Graphic: When set font A(12 24).</p>

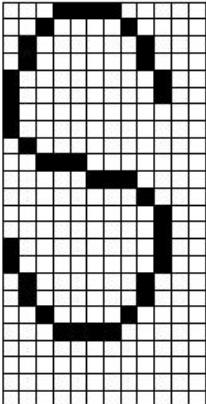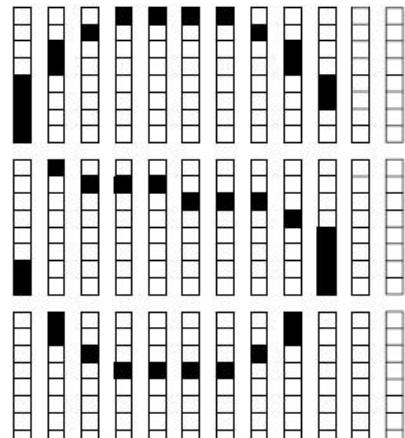	  
Example	<p>d1 = <0F>H d4 = <30>H d7 = <40>H d2 = <03>H d5 = <80>H d8 = <40>H d3 = <00>H d6 = <00>H d9 = <20>H</p> <p>(1)y = 2 1B 40 1b 26 02 20 20 06 FF FF 1b 25 01 20 20 0D 0A 1b 3f 20 30 20 30 20 0d 0a (2)y = 3 1B 40 1b 26 03 20 20 06 FF FF FF FF FF FF 1b 25 01 20 20 0D 0A 1b 3f 20 30 20 30 20 0d 0a</p>

Cancel user customized characters

Name	Cancel user customized characters
Code	ASCII : ESC ? n DEC : 27 63 n HEX : 1B 3F n
Function	Cancel user customized characters of specified code by n
Range	32 ≤ n ≤ 126
Default	None
Notes	This command terminates the use of styles defined for character encoding, which is specified by n. After the user customized character is canceled, it is printed in the corresponding mode of the internal character. In the font selected with ESC !, the command removes the style defined for the specified encoding. If a user customized character is not defined, the printer ignores the command.

Example	None
---------	------

Selecting international character set

Name	Selecting international character set																																		
Code	ASCII : ESC R n DEC : 27 82 n HEX: 1B 52 n																																		
Function	Selecting international character set n from the following table: <table> <thead> <tr> <th>n</th> <th>Character</th> </tr> </thead> <tbody> <tr><td>0</td><td>U.S.A</td></tr> <tr><td>1</td><td>France</td></tr> <tr><td>2</td><td>Germany</td></tr> <tr><td>3</td><td>U.K</td></tr> <tr><td>4</td><td>Denmark I</td></tr> <tr><td>5</td><td>Sweden</td></tr> <tr><td>6</td><td>Italy</td></tr> <tr><td>7</td><td>Spain I</td></tr> <tr><td>8</td><td>Japan</td></tr> <tr><td>9</td><td>Norway</td></tr> <tr><td>10</td><td>Denmark II</td></tr> <tr><td>11</td><td>Spain II</td></tr> <tr><td>12</td><td>Latin America</td></tr> <tr><td>13</td><td>Korea</td></tr> <tr><td>14</td><td>Slovenia</td></tr> <tr><td>15</td><td>China</td></tr> </tbody> </table>	n	Character	0	U.S.A	1	France	2	Germany	3	U.K	4	Denmark I	5	Sweden	6	Italy	7	Spain I	8	Japan	9	Norway	10	Denmark II	11	Spain II	12	Latin America	13	Korea	14	Slovenia	15	China
n	Character																																		
0	U.S.A																																		
1	France																																		
2	Germany																																		
3	U.K																																		
4	Denmark I																																		
5	Sweden																																		
6	Italy																																		
7	Spain I																																		
8	Japan																																		
9	Norway																																		
10	Denmark II																																		
11	Spain II																																		
12	Latin America																																		
13	Korea																																		
14	Slovenia																																		
15	China																																		
Range	0 ≤ n ≤ 15																																		
Default	0																																		
Notes	None																																		
Example	1B 40 1B 52 00 20 21 22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F 30 31 32 33 34 35 36 37 38 39 3A 3B 3C 3D 3E 3F 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E 4F 50 51 52 53 54 55 56 57 58 59 60 6A 6B 6C 6D 6E 6F 70 71 72 73 74 75 76 78 79 7A 7B 7C 7D 7E 0D 0A																																		

Select character code

Name	Select character code										
Code	ASCII : ESC t n DEC : 27 116 n HEX : 1B 74 n										
Function	Selects n from character code <table> <thead> <tr> <th>N</th> <th>Code Page</th> </tr> </thead> <tbody> <tr><td>0</td><td>CP437 [U.S.A., Standard Europe]</td></tr> <tr><td>1</td><td>KataKana</td></tr> <tr><td>2</td><td>CP850 [Multilingual]</td></tr> <tr><td>3</td><td>CP860 [Portuguese]</td></tr> </tbody> </table>	N	Code Page	0	CP437 [U.S.A., Standard Europe]	1	KataKana	2	CP850 [Multilingual]	3	CP860 [Portuguese]
N	Code Page										
0	CP437 [U.S.A., Standard Europe]										
1	KataKana										
2	CP850 [Multilingual]										
3	CP860 [Portuguese]										

	4 CP863 [Canadian-French]
	5 CP865 [Nordic]
	6 WCP1251 [Cyrillic]
	7 CP866 Cyrillic #2
	8 MIK [Cyrillic /Bulgarian]
	9 CP755 [East Europe, Latvian 2]
	10 Iran
	11 Reserve
	12 Reserve
	13 Reserve
	14 Reserve
	15 CP862 [Hebrew]
	16 WCP1252 Latin I
	17 WCP1253 [Greek]
	18 CP852 [Latina 2]
	19 CP858 Multilingual Latin I +Euro)
	20 Iran II
	21 Latvian
	22 CP864 [Arabic]
	23 ISO-8859-1 [West Europe]
	24 CP737 [Greek]
	25 WCP1257 [Baltic]
	26 Thai
	27 CP720[Arabic]
	28 CP855
	29 CP857[Turkish]
	30 WCP1250[Central Europe]
	31 CP775
	32 WCP1254[Turkish]
	33 WCP1255[Hebrew]
	34 WCP1256[Arabic]
	35 WCP1258[Vietnam]
	36 ISO-8859-2[Latin 2]
	37 ISO-8859-3[Latin 3]
	38 ISO-8859-4[Baltic]
	39 ISO-8859-5[Cyrillic]
	40 ISO-8859-6[Arabic]
	41 ISO-8859-7[Greek]
	42 ISO-8859-8[Hebrew]
	43 ISO-8859-9[Turkish]
	44 ISO-8859-15 [Latin 9]
	45 Thai2
	46 CP856
	47 Cp874
	252 CP932 SHIFT_JIS

	253 UNICODE UCS-2 254 BIG5 255 GBK
Range	$0 \leq n \leq 255$
Default	0
Notes	None
Example	1B 40 1C 2E 1B 74 00 80 81 82 83 84 85 86 87 88 89 8A 8B 8C 8D 8E 8F 90 91 92 93 94 95 96 97 98 9A 9B 9C 9D 9E 9F A0 A1 A2 A3 A4 A5 A6 A7 A8 A9 AA AB AC AD AE AF B0 B1 B2 B3 B4 B5 B6 B7 B8 B9 BA BB BC B D BE BF C0 C1 C2 C3 C4 C5 C6 C7 C8 C9 CA CB CC CD CE CF D 0 D1 D2 D3 D4 D5 D6 D7 D8 D9 DA DB DC DD DE DF E0 E1 E2 E3 E4 E5 E6 E7 E8 E9 EA EB EC ED EE EF F0 F1 F2 F3 F4 F5 F6 F 7 F8 F9 FA FB FC FD FE FF 0D 0A

③Graphic printing command

Fill Graphics vertical module data

Name	Fill Graphics vertical module data
Code	ASCII : ESC * m Hl Hh [d]k DEC : 27 42 m Hl Hh [d]k HEX : 1B 2A m Hl Hh [d]k
Function	Print vertical module graphic data, the parameters are as below: m is bit map format: m mode horizontal scale vertical scale 0 8dots single density ×2 ×3 1 8dots double density ×1 ×3 32 24dots single density ×2 ×1 33 24dots double density ×1 ×1 Hl、Hh is horizontal direction dots(Hl + 256×Hh) [d]k is bit map data K used for indicating bit map data bytes, not for transfer.
Parameter range	XX58: m = 0、1、32、33 $1 \leq Hl + Hh \times 256 \leq 384$ $0 \leq d \leq 255$ k = Hl + Hh × 256 (when m = 0、1) k = (Hl + Hh × 256) × 3 (when m = 32、33) XX80: m = 0、1、32、33 $1 \leq Hl + Hh \times 256 \leq 576$ $0 \leq d \leq 255$ k = Hl + Hh × 256 (when m = 0、1) k = (Hl + Hh × 256) × 3 (when m = 32、33)
Default	None

	<p>[d]k corresponding bit is 1 which means that this bit can print. While it is 0, it will not print.</p> <p>8 dot</p> <p>24 dot</p>
Notes	<p>The command fills only the printing buffer, graphics printing can start only after receiving the printing commands. Printing buffer will be cleared after graphic printing.</p> <p>If you need to print higher graphics, you can divide it into several sections which has 8 (m = 0、1) or 24 (m = 32、33) dots graphics to print.</p> <p>After filling graphic data, you can continue to fill other information to make graphic and other information print simultaneously.</p> <p>After filling bitmap, you can use ESC J(n=24) command to print, and also can use LF command to print. But using LF command will cause paper feeding (feeding paper according to the line space), and make graphic continuous between different lines. And can set line space as 0 to avoid feeding too much. (Dot matrix printer may drift when it starts, pls send data continuously if occurs line broken).</p>
Example	<pre>1B 40 1b 2a 00 0C 00 FF 1B 33 00 0A</pre>

Print Graphics horizontal module data

Name	Print Graphics horizontal module data																				
Code	<p>ASCII : GS v 0</p> <p>DEC : 29 118 48 m xL xH yL yH [d]k</p> <p>HEX : 1D 76 30 m xL xH yL yH [d]k</p>																				
Function	<p>Print horizontal module graphic data, the parameters are as below:</p> <p>m as bitmap method:</p> <table> <tr> <td>m</td> <td>Model</td> <td>Horizontal scale</td> <td>Vertical scale</td> </tr> <tr> <td>0,48</td> <td>Normal</td> <td>× 1</td> <td>× 1</td> </tr> <tr> <td>1,49</td> <td>Double-width</td> <td>× 2</td> <td>× 1</td> </tr> <tr> <td>2,50</td> <td>Double-height</td> <td>× 1</td> <td>× 2</td> </tr> <tr> <td>3,51</td> <td>Quadruple</td> <td>× 2</td> <td>× 2</td> </tr> </table> <p>xL、xH were selected as the data bytes (xL+xH×256) in the horizontal direction for the bitmap.</p> <p>yL, yH were selected as the data bytes (yL+yH×256) in the vertical direction for the bitmap.</p> <p>[d]k for bitmap data</p> <p>k for bitmap data bytes, k used for indicating, not for transfer.</p>	m	Model	Horizontal scale	Vertical scale	0,48	Normal	× 1	× 1	1,49	Double-width	× 2	× 1	2,50	Double-height	× 1	× 2	3,51	Quadruple	× 2	× 2
m	Model	Horizontal scale	Vertical scale																		
0,48	Normal	× 1	× 1																		
1,49	Double-width	× 2	× 1																		
2,50	Double-height	× 1	× 2																		
3,51	Quadruple	× 2	× 2																		

Parameter range	XX58: 0 ≤ m ≤ 3; 48 ≤ m ≤ 51 1 ≤ xL + xH×256 ≤ 48 0 ≤ yL ≤ 255, 0 ≤ yH ≤ 255 0 ≤ d ≤ 255 $k = (Hl + Hh \times 256) \times (yL + yH \times 256)$																
	XX80: 0 ≤ m ≤ 3; 48 ≤ m ≤ 51 1 ≤ xL + xH×256 ≤ 72 0 ≤ yL ≤ 255, 0 ≤ yH ≤ 255 0 ≤ d ≤ 255 $k = (Hl + Hh \times 256) \times (yL + yH \times 256)$																
Default	None																
Notes	[d] k corresponding bit is 1, which means that this bit can print. While it is 0, it means that this bit can not print. If the horizontal bytes exceed printing area, then the exceeding part will be ignored. The paper feeds accordingly to the image size when this command is using, not influenced by the setting of ESC 2, ESC 3 line space. After this command, the printing coordinates will be reset to the left margin and the image content will be cleared. the relationship between bitmap data and the printing effect is as below: <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>d1</td><td>d2</td><td>.....</td><td>dx</td></tr> <tr> <td>d(x+1)</td><td>d(x+2)</td><td>.....</td><td>d(x×2)</td></tr> <tr> <td> </td><td> </td><td>.....</td><td> </td></tr> <tr> <td>.....</td><td>d(k-2)</td><td>d(k-1)</td><td>dk</td></tr> </table> <p style="text-align: center;">MSB LSB MSB LSB MSB LSB MSB LSB</p> <p>This command has the printing function, data will be transferred while printing, no need to use the printing command again</p>	d1	d2	dx	d(x+1)	d(x+2)	d(x×2)			d(k-2)	d(k-1)	dk
d1	d2	dx														
d(x+1)	d(x+2)	d(x×2)														
																
.....	d(k-2)	d(k-1)	dk														
Example	1B 40 1d 76 30 00 03 00 09 00 FF FF FF FF FF FF FF FF FF																

Define downloaded bitmap

Name	Define downloaded bitmap
Code	ASCII : GS * x y d1...d(x×y×8) DEC : 29 42 x y d1 ...d(x×y×8) HEX : 1D 2A x y d1...d(x×y×8)
Function	using x and y to appoint dots to define the downloaded bitmap x appoints that the horizontal dots as 8*x. y appoints that the vertical dots as 8*y.
Parameter	1 ≤ x ≤ 255

range	$1 \leq y \leq 48$ $x * y \leq 1536$ $0 \leq d \leq 255$
Default	None
Notes	<p>If $x * y$ is out of the specified range, this command will be forbidden.</p> <p>The d indicates bitmap data. Data (d) specifies the printing bit as 1 and the not printing bit as 0.</p> <p>The downloaded bitmap definition will be cleared when:</p> <ul style="list-style-type: none"> ESC @ is executed. ESC & is executed. Printer is reset or the power is turned off. <p>The following figure shows the relationship between the downloaded bitmap and the printed data</p>
Example	<pre> 1B 40 1D 2A 03 03 FF 1D 2F 00 </pre>

Print downloaded bitmap

Name	Print downloaded bitmap
Code	ASCII : GS / m DEC : 29 47 m HEX : 1D 2F m
Function	Prints a downloaded bitmap using the mode specified by m.

	Using the mode that m appointed to print downloaded bitmap										
	<table border="1"> <tr> <td>m</td> <td>Model</td> </tr> <tr> <td>0, 48</td> <td>Normal</td> </tr> <tr> <td>1, 49</td> <td>Double-width</td> </tr> <tr> <td>2, 50</td> <td>Double-height</td> </tr> <tr> <td>3, 51</td> <td>Quadruple</td> </tr> </table>	m	Model	0, 48	Normal	1, 49	Double-width	2, 50	Double-height	3, 51	Quadruple
m	Model										
0, 48	Normal										
1, 49	Double-width										
2, 50	Double-height										
3, 51	Quadruple										
Parameter range	$0 \leq m \leq 3$ $48 \leq m \leq 51$										
Default	None										
Notes	<p>this command will be ignored if the bitmap data has not been defined.</p> <p>In standard mode, this command is effective only when there is no data in the buffer area.</p> <p>This command has no effect in the print modes (emphasized, double-strike, downloadedline, character size, or white/black reverse printing), except for upsidedown printing mode.</p> <p>If the downloaded bitmap which will be printed exceeds the printing area, then the excess data will not be printed.</p>										
Example	No										

Define NV bitmap

Name	Define NV bitmap
Code	ASCII : FS q n [xL xH yL yH d1...dk]1...[xL xH yL yH d1...dk]n DEC : 28 113 n [xL xH yL yH d1...dk]1...[xL xH yL yH d1...dk]n HEX : 1C 71 n [xL xH yL yH d1...dk]1...[xL xH yL yH d1...dk]n
Function	Define the NV bitmap using the specified n. n specifies the number of the defined NV bitmap. xL, xH means that the defined NV bitmap specifies the horizontal dots as $(xL+xH*256)*8$ yL, yH means that the defined NV bitmap specifies the vertical dots as $(yL + yH*256)*8$
Parameter range	$1 \leq n \leq 255$ $0 \leq xL \leq 255$ $0 \leq xH \leq 3$ $(1 \leq (xL+xH*256) \leq 1023)$ $0 \leq yL \leq 255$ $0 \leq yH \leq 1$ $(1 \leq (yL+yH*256) \leq 288)$ $0 \leq d \leq 255$ k = $(xL+xH*256)*(yL+yH*256)*8$ Totaled the defined data Area = 64 k bytes
Default	None
Support Model	All
Notes	Frequent writing command executions may damage the NV memory.

Therefore, it is recommended to write the NV memory no more than 10 times per day.

The printer performs a hardware reset operation after the procedure of placing the image into the NV memory. Therefore, user-defined characters, downloaded bitmaps should be defined only after completing this command. The printer clears the receiving and printing buffers and resets the printer to the mode that workable when power on. (hardware reset interface is not supported)

This command cancels all NV bitmaps that have already been defined by this command.

From the beginning of the processing of this command till the accomplishment of hardware reset, mechanical operations (including initializing the position of the print head when the cover is open, paper feeding using the FEED button, etc.) cannot be performed.

During this command processing, the printer is busy and stops receiving data when writing data to the user's NV memory. Therefore, data transmission, including real-time commands, is prohibited during the execution of this command.

NV bitmap is a bitmap defined in non-volatile memory, Define FS p printing with FS q.

In standard mode, this command is valid only when processed at the beginning of the line.

This command is valid when 7 bytes <FS yH> of the command are processed normally.

When the data volume exceeds the left capacity of the range defined by xL, xH, yL, and yH, the printer will process the range defined by xL, xH, yL, and yH outside the defined range.

In the first group of NV bitmaps, when any one of xL, xH, yL, yH is out of the definition range, this command is disabled.

In groups of NV bitmaps other than the first group, when xL, xH, yL, yH out of the defined range, it stops processing this command and starts writing into the NV images. At this time, NV bitmaps that have n't been defined are disabled (undefined), but any NV bitmaps before that are enabled.

The d indicates the definition data. In data (d) a 1 bit specifies a dot to be printed and a 0 bit specifies a dot not to be printed.

This command defines n as the number of a NV bitmap. Numbers rise in order from NV bitmap 01H. Therefore, the first data group [xL xH yL yH d1...dk] is NV bitmap 01H, and the last data group [xL xH yL yH d1...dk] is NV bitmap n. The total agrees with the number of NV bitmaps specified by the command FS p.

The definition data for an NV bitmap consists of [xL xH yL yH d1...dk]. Therefore, when only one NV bitmap is defined n=1, the printer processes a data group [xL xH yL yH d1...dk] once. The printer uses ([data: (xL xH× 256)×(yL yH× 256)×8] [header :4]) bytes of NV memory.

The definition area in this printer is a maximum of 192K bytes. This command can define several NV bitmaps, but cannot define bitmap data whose total capacity [bitmap data header] exceeds 192K byte


S.

The printer does not transmit ASB status or perform status detection during processing of this command even when ASB is specified.

Once an NV bitmap is defined, it is not erased by performing ESC @, reset, and power off.

This command performs only definition of an NV bitmap and does not perform printing. Printing of the NV bitmap is performed by the FS pcommand.

Diagram: when $xL = 64$, $xH = 0$, $yL = 96$, $yH = 0$

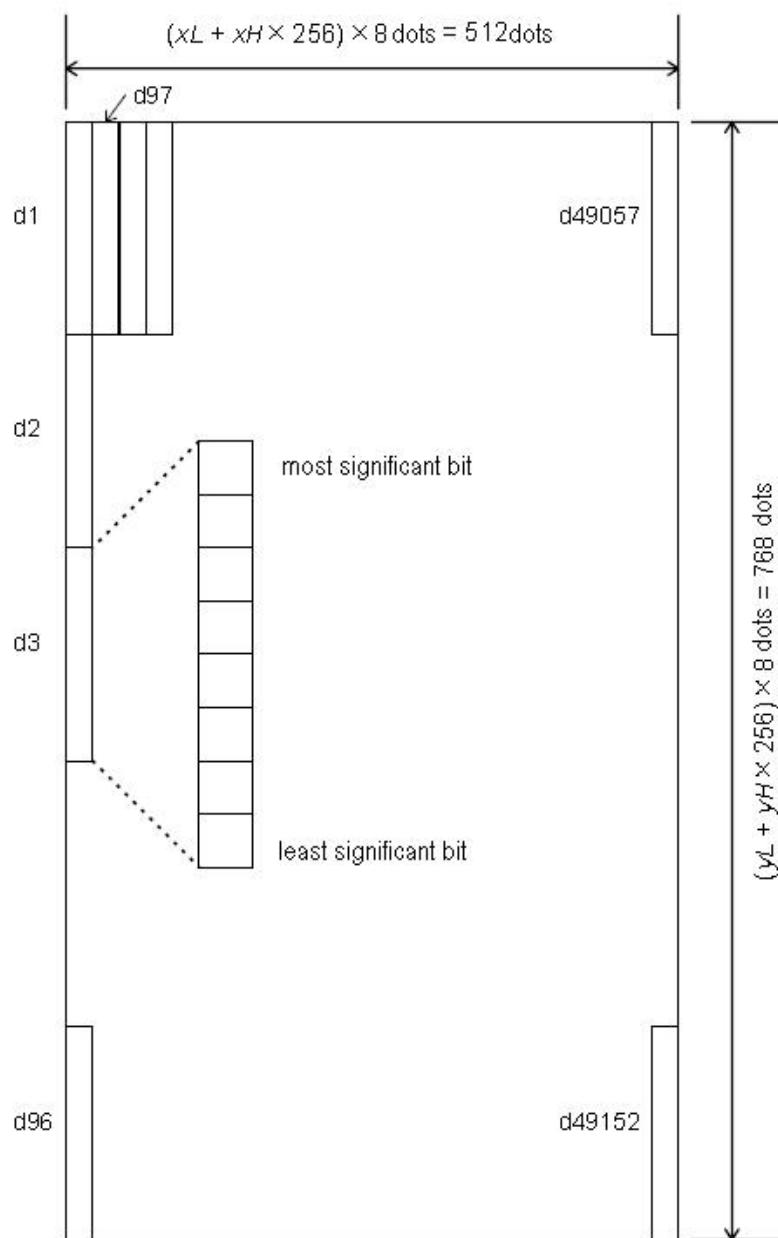

Example	1B 40 1C 71 01 03 00 03 00 FF FF FF FF FF FF FF FF
---------	--

	FF FF FF FF FF FF FF FF FF 1C 70 01 00
--	---

Print NV bitmap


Name	Print NV bitmap										
Code	ASCII : FS p n m DEC : 28 112 n m HEX : 1C 70 n m										
Function	Print NV bitmap n using the mode specified by m. <table border="1" style="margin-left: 20px;"> <tr> <th>m</th> <th>Mode</th> </tr> <tr> <td>0, 48</td> <td>Normal</td> </tr> <tr> <td>1, 49</td> <td>Double-width</td> </tr> <tr> <td>2, 50</td> <td>Double-height</td> </tr> <tr> <td>3, 51</td> <td>Quadruple</td> </tr> </table>	m	Mode	0, 48	Normal	1, 49	Double-width	2, 50	Double-height	3, 51	Quadruple
m	Mode										
0, 48	Normal										
1, 49	Double-width										
2, 50	Double-height										
3, 51	Quadruple										
Parameter range	$0 \leq m \leq 3$ $48 \leq m \leq 51$ $1 \leq n \leq 255$										
Default	None										
Support	All										
Notes	<p>n is the number of the NV bitmap (defined using the FS q command). m specifies the bitmap mode.</p> <p>NV bitmap is a bitmap defined in non-volatile memory by FS q and printed by FS p.</p> <p>This command is not effective when the specified NV bitmap has not been defined.</p> <p>In standard mode, this command is effective only when there is no data in the print buffer.</p> <p>This command is not affected by print modes (Bold printing, overlapping, underline, character size, white/black reverse printing, or 90° rotated characters, etc.), except upside-down printing mode.</p> <p>If the downloaded bit-image to be printed exceeds one line, the excess data is not printed.</p> <p>This command feeds dots (for the height n of the NV bitmap) in normal and double-width modes, and (for the height n - 2 of the NV bitmap) in double height and quadruple modes, regardless of the line space specified by ESC 2 or ESC 3.</p> <p>After printing the bitmap, this command sets the print position to the beginning of the line and processes the data that follows as normal data.</p>										
Example	None										

④Tab Commands

Horizontal tab

Name	Horizontal tab
Code	ASCII : HT DEC : 9 HEX : 09
FUNCTION	Move the print position to the next tab position
Parameter range	None
Defaults	None
Notes	Tab position set by ESC D If the tab position is not set(the default is no horizontal position),this command will be treated as an LF command If the tab position exceeds the print area,the coordinates will move to the start position of the next line(as the data is full,print and wrap)
Example	none

Horizontal tab position setting

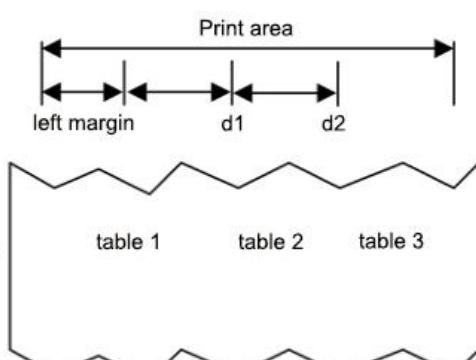Name	horizontal tab position setting
Code	ASCII : ESC D [d]k NUL DEC : 27 68 [d]k 0 HEX : 1B 44 [d]k 00
Function	Set horizontal tab position, parameter meaning as below: d1 ... dk: horizontal position,in 8 as unit,null as the terminator
Parameter range	XX58: $1 \leq d \leq 46$ ($d_1 < d_2 < \dots < d_k$, $1 \leq k \leq 16$) XX80: $1 \leq d \leq 70$ ($d_1 < d_2 < \dots < d_k$, $1 \leq k \leq 16$)
Defaults	The default positioning position is the 8-character interval(Column 9 17 25...) of the font A(12-24)
Support model	All
Notes	Tab position as below:  <p>TAB position d1 and d2 setting Maximum support for the setting of 16 tab position Using this command, the setting of previous tab position will be canceled k is for indication purpose,no transmission When transport [d]k, and come across NULL, should be considered over</p>

	<p>r</p> <p>If dk less than or equal to dk-1,should be considered over, and balance data is treated as normal data processing</p> <p>TAB position could be changed by HT command</p> <p>When the left margin changes, the TAB position changes simultaneously</p> <p>The command setting will be valid after ESC @、 printer reset、 power off</p>
Example	1B 44 04 06 08 0A 00 09 30 09 31 09 32 09 33 0D 0A

⑤One-dimension bar code command

1D bar code readable character(HRI) print position setting

Name	1D bar code readable character(HRI)print position setting
Code	ASCII : GS H n DEC : 29 72 n HEX : 1D 48 n
Function	Set 1D bar code readable character(HRI)print position,n parameter meaning as below: n print position 0, 48 don't print 1, 49 above the bar code 2, 50 below the bar code 3, 51 above and below the bar code
Parameter range	$0 \leq n \leq 3$ or $48 \leq n \leq 51$
Defaults	n = 0
Notes	The command setting will be valid after ESC @、 printer reset、 power off
Example	None

1D bar code height setting

Name	1D bar code height setting
Code	ASCII : GS h n DEC : 29 104 n HEX : 1D 68 n
Function	Parameter n specifies the height of a bar code in dots:  Height 50  Height 100
Parameter range	$1 \leq n \leq 255$

Defaults	n = 64
Notes	The command setting will be valid after ESC @、 printer reset、 power off
Example	None

1D bar code width setting

Name	1D bar code width setting
Code	ASCII : GS w n DEC : 29 119 n HEX : 1D 77 n
Function	Parameter n specifies the unit of a bar code in dots:  Width 3  Width 4
Parameter range	1 ≤ n ≤ 6
Defaults	n = 2
Notes	The command setting will be valid after ESC @、 printer reset、 power off
Example	None

1D bar code printing

Name	1D bar code printing									
Code	(A) ASCII : GS k m [d]k NUL DEC : 29 107 m [d]k NUL Hex : 1D 6B m [d]k NUL (B) ASCII : GS k m n [d]k DEC : 29 107 m n [d]k Hex : 1D 6B m n [d]k									
Function	1D bar code printing, the parameters meaning as below: m is encoding n is code data length, only for (command B), the difference between (A) and (B) is that the data (A) end with NULL, but (B) indicates the data length [d]k is bar code data K is the length of the bar code data, for sign, no transmission Parameters relationship as below: (Command A) <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td rowspan="2">m</td> <td rowspan="2">Coding system</td> <td colspan="3">Bar code length (SP show space)</td> </tr> <tr> <td>Data</td> <td>k</td> <td>Character set</td> <td>Data (d)</td> </tr> </table>	m	Coding system	Bar code length (SP show space)			Data	k	Character set	Data (d)
m	Coding system			Bar code length (SP show space)						
		Data	k	Character set	Data (d)					

		length			
0	UPC-A	fixed	k = 11, 12	0~9	48≤d≤57
1	UPC-E	fixed	6≤k≤8, k = 11, 12	0~9	48≤d≤57 [when k = 7,8, 11,12, d1 = 48]
2	JAN13 (EAN13)	fixed	k = 12, 13	0~9	48≤d≤57
3	JAN8 (EAN8)	fixed	k = 7, 8	0~9	48≤d≤57
4	CODE39	changeable	1≤k	0~9, A~Z SP, \$, %, *, +, -, ., /	48≤d≤57, 65≤d≤90, d = 32, 36, 37, 42, 4 3, 45, 46, 47
5	ITF (Interleaved 2 of 5)	changeable	2≤k≤255 (even numbers)	0~9	48≤d≤57
6	CODABAR (NW-7)	changeable	1≤k	0~9, A~D, a~d \$, +, -, ., /, :	48≤d≤57, 65≤d≤68, 97≤d≤100, d = 36, 43, 45, 46, 4 7, 58 (65≤d1≤68, 65≤dk≤68, 97≤d1≤100, 97≤dk≤100)

(Command B)

m	Coding system	Bar code length (SP show space)			
		Datalenth	n	Character set	Data (d)
65	UPC-A	fixed	n = 11, 12	0~9	48≤d≤57
66	UPC-E	fixed	6≤n≤8, n = 11, 12	0~9	48≤d≤57 [when n = 7,8, 11,12, d1 = 48]
67	JAN13 (EAN1)	fixed	n = 12, 13	0~9	48≤d≤57

	3)					
68	JAN8 (EAN8)	fixed	n = 7, 8	0~9	48≤d≤57	
69	CODE3 9	changeable	1≤n	0~9, A~Z SP, \$, %, *, +, -, ., /	48≤d≤57, 65≤d≤90, d = 32, 36, 37, 42, 4 3, 45, 46, 47	
70	ITF (Interleaved 2 of 5)	changeable	2≤n≤255 (even numbers)	0~9	48≤d≤57	
71	CODA BAR (NW-7)	changeable	1≤n	0~9, A~D, a~d \$, +, -, ., /, :	48≤d≤57, 65≤d≤68, 97≤d≤100, d = 36, 43, 45, 46, 4 7, 58 (65≤d1≤68, 65≤dk≤68, 97≤d1≤100, 97≤dk≤100)	
72	CODE9 3	changeable	1≤n≤255	00H~7FH	0≤d≤127	
73	CODE1 28	changeable	1≤n≤255	00H~7FH C1H~C4H(F NC)	0≤d≤127 d = 193, 194, 195,196	
74	UCC/E AN128	changeable	1≤n≤255	00H~7FH C1H~C4H(F NC)	0≤d≤127 d = 193, 194, 195,196	
Parameter range	(A) 0 ≤ m ≤ 6 (B) 65 ≤ m ≤ 74					
Defaults	None					
Notes	<p>If the bar code width exceed the printable area, the printer does not perform barcode printing</p> <p>Paper feed as needed when the command is carried out, that not affected by ESC2,ESC3 line space settings, and do not influence line space settings</p> <p>The command is not affected by ESC ! character style setting</p> <p>The print position is resorted to the print start location after the command is executed</p> <p>m parameter 0 ~ 6(A) and 65 ~ 71(B) select the same coding system, the same printing effect</p> <p>m parameter is 0 ~ 6(A), barcode data end with NULL</p> <p>m parameter is 65 ~ 74(B), barcode data n stand for data length K is for sign, no transmission</p>					

When print UPCA ($m = 0$ or 65), Please pay attention for the following points:

Whatever the input data length is 11 or 12, the check bit is automatically inserted or corrected

Initial character, central split character, and terminator are inserted automatically

When print UPCE ($m = 1$ or 66), Please pay attention as following:

The system character (NSC) 0 will be inserted automatically when data length is 6

The first system character (NSC) d1 must be 0 when the data length is 7, 8, 11 and 12.

Whatever the data length is 6, 7, 8, 11 and 12, the check bit inserted or corrected automatically

Whatever the input data length is 6, 7, 8, 11, and 12, the barcode readable character (HRI) just show 6 as data, but excluded system character (NSC) and check code;

The transition relation between transmission and printing data as below:

Transmitted data												Printed data					
d2	d3	d4	d5	d6	d7	d8	d9	d10	d11	d1	d2	d3	d4	d5	d6		
0~9	0~9	0	0	0	-	-	0~9	0~9	0~9	d2	d3	d9	d10	d11	0		
0~9	0~9	1	0	0	-	-	0~9	0~9	0~9	d2	d3	d9	d10	d11	1		
0~9	0~9	2	0	0	-	-	0~9	0~9	0~9	d2	d3	d9	d10	d11	2		
0~9	0~9	3~9	0	0	-	-	-	0~9	0~9	d2	d3	d4	d10	d11	3		
0~9	0~9	0~9	1~9	0	-	-	-	-	0~9	d2	d3	d4	d5	d11	4		
0~9	0~9	0~9	0~9	1~9	-	-	-	-	5~9	d2	d3	d4	d5	d6	d11		

When d6 is 1~9, be sure d7, d8, d9, d10 are 0, and d11 is 5~9

Initial character, terminator automatically inserted

When print EAN13($m = 2$ or 67), Please pay attention as following:

Whatever the input data length is 12 or 13, check bit is automatically inserted or corrected

Initial character, central split character and terminator inserted automatically

When print EAN8($m = 3$ or 68), please pay attention as following:

Whatever input data length is 7 or 8, the check bit is automatically inserted or corrected

Initial character, central split character and terminator inserted automatically

When print CODE39($m = 4$ or 69), please pay attention as following:

When d1 or dn are not Initial character/terminator “*”, encoder is automatically inserted “*”

When middle of the data encounter “*”, the encoder regard it as terminator, the other data as the normal data;

The check bit could not calculate and add automatically

When print ITF25($m = 5$ or 70), please pay attention as following:
 Initial character and terminator inserted automatically
 The check bit could not calculate and add automatically
 When print CODABAR (NW-7) ($m = 6$ or 71),please pay attention as following:
 Initial character and terminator could not inserted automatically,but m anual addition by user, that the range from “A”~”D” or “a”~”d”
 Check bit could not calculate and add automatically
 When print CODE93($m = 72$),please pay attention as following:
 Initial character and terminator inserted automatically
 The two check code are automatically calculated and then inserted
 When barcode readable character(HRI) is set to print, there is no HRI character which indicating start/end
 When barcode readable character(HRI) is set to print,the control chara cter will be replaced with space
 When print CODE128($m = 73$),please pay attention as following:
 The encoding system intelligently identifies data and implements mini mum length encoding without the user set character (include starting c haracter set) or switch character
 Function character FNC1~FNC4 use C1H~C4H and input it
 The check bit could calculate and add automatically
 When barcode readable character(HRI) is set to print,the control chara cter and FNC1~FNC4 will be replaced with space
 When print EAN128($m = 74$),please pay attention as following:

Basic construction as below:

Initial c haracter set	FNC1	AI	Data par t	Check bit A	Check bit B	Terminat or
Inserted automatic ally	(d1...dk)				Inserted automatic ally	

Connection structure as below:

Initi al c haracter set	FN C1	AI	Dat a pa rt	Che ck b it A	FN C1	AI	Dat a pa rt	Che ck b it A	Che ck b it B	Ter min ator
Inserted a utomatically	(d1...dk)								Inserted a utomatically	

The encoding system intelligently identifies data and implements mini mum length encoding without the user set character (include starting c haracter set) or switch character

Function character FNC1~FNC4 use C1H~C4H and input it
 User input data AI,which do not need “(“)” for indication,encoding sy stem inserted automatically,otherwise it will be wrong.For example,G S k 74 18 "019501234567890*", 01 is AI,the following will be wrong:GS k 74 18 "(01)9501234567890"

When user use the connection structure,need to insert FNC1(C1H” Decimal=193”) in the middle.The input example as following:

	GS k 74 18 "019501234567890*" 193 "029501234567890*" When barcode readable character(HRI) is set to print, the control character will be replaced with space, then cancel FNC1~FNC4
Example	1b 40 1d 48 02 1d 6b 41 0c 31 32 33 34 35 36 37 38 39 30 31 32 1d 6b 42 0c 30 32 33 34 35 36 30 30 30 30 38 39 1d 6b 43 0c 30 32 33 34 35 36 30 30 30 30 38 39 1d 6b 44 08 30 32 33 34 35 36 30 30 1d 6b 45 08 30 32 33 34 35 36 30 30 1d 6b 46 08 30 32 33 34 35 36 30 30 1d 6b 47 08 41 32 33 34 35 36 30 41 1d 6b 48 08 41 30 32 33 34 35 36 41 1d 6b 49 08 41 30 32 33 34 35 36 41

⑥ Printing QR code

Mode type of 2-D bar code

Name	Mode type of 2-D bar code
Code	ASCII : GS(k pL pH cn fn n Decimal : 29 40 107 pL pH cn fn n Hexadecimal : 1D 28 6b pL pH cn fn n
Function	Setting mode type of two-dimension bar code to [n dot × n dot].
Parameter range	pL=3, pH=0 cn=49 fn=67 $0 \leq n \leq 16$
Default	n=3
Notes	Setting mode type of QR code to [n dot × n dot].
Example	None
Name	Mode type of 2-D bar code

Setting error correction level of 2-D bar code

Name	Setting error correction level of 2-D bar code			
Code	ASCII : GS(k pL pH cn fn n DEC : 29 40 107 pL pH cn fn n HEX : 1D 28 6b pL pH cn fn n			
Function	Setting error correction level of two-dimension bar code			
Parameter range	pL=3, pH=0 cn=49 fn=69 $48 \leq n \leq 51$			
Default	n=48			
Notes	Setting error correction level of two-dimension bar code <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="width: 50px;">n</td> <td style="width: 200px;">Function</td> <td style="width: 300px;">Approximate Amount of correction</td> </tr> </table>	n	Function	Approximate Amount of correction
n	Function	Approximate Amount of correction		

	4 8	Error correction level (L)	7%	
	4 9	Error correction level (M)	15%	
	5 0	Error correction level (Q)	25%	
	5 1	Error correction level (H)	30%	
Example	None			
Name	Setting error correction level of 2-D bar code			

Store 2-D bar code data to data buffer

Name	Store two-dimension bar code data to data buffer
Code	ASCII : GS(k pL pH cn fn m d1...dk DEC : 29 40 107 pL pH cn fn m d1...dk HEX : 1D 28 6b pL pH cn fn m d1...dk
Function	Store two-dimension bar code data to data buffer
Parameter range	$4 \leq (pL + pH \times 256) \leq 7092$ ($0 \leq pL \leq 255$, $0 \leq pH \leq 28$) cn=49 fn=80 m=48 $0 \leq d \leq 255$ $k = (pL + pH \times 256) - 3$
Default	No
Notes	Store two-dimension bar code data (d1...dk) to data buffer. ((pL + pH × 256) - 3) bytes is processed as a graphic data after the m (d 1... dk).
Example	None
Name	Store two-dimension bar code data to data buffer

Printing two-dimension bar code

Name	Printing two-dimension bar code
Code	ASCII : GS(k pL pH cn fn m DEC : 29 40 107 pL pH cn fn m HEX : 1D 28 6b pL pH cn fn m
Function	Printing QR code
Parameter range	pL=3, pH=0 cn=49 fn=81 m=48
Default	None
Notes	Printing two-dimension bar code. Users must consider two-dimension bar code graph space. (The space of up and down, left and right of two-dimension bar code graph is specified in the specification.)
Example	1b 40

	1d 28 6b 03 00 31 43 03 1d 28 6b 03 00 31 45 30 1d 28 6b 06 00 31 50 30 41 42 43 1b 61 01 1d 28 6b 03 00 31 52 30 1d 28 6b 03 00 31 51 30
Name	Printing two-dimension bar code

Setting two-dimension bar code graph information

Name	Setting two-dimension bar code graph information																																															
Code	ASCII : GS(k pL pH cn fn m DEC : 29 40 107 pL pH cn fn m HEX : 1D 28 6b pL pH cn fn m																																															
Function	<p>Setting two-dimension bar code graph information The detailed graph information is as follows:</p> <table border="1"> <thead> <tr> <th>Transmit data</th> <th>Hexadecimal</th> <th>Decimal</th> <th>Data type</th> </tr> </thead> <tbody> <tr> <td>Header</td> <td>37H</td> <td>55</td> <td>1byte</td> </tr> <tr> <td>Flag</td> <td>36H</td> <td>54</td> <td>1byte</td> </tr> <tr> <td>Width</td> <td>30H-39H</td> <td>48-57</td> <td>1-5byte</td> </tr> <tr> <td>Separator</td> <td>1FH</td> <td>31</td> <td>1byte</td> </tr> <tr> <td>Height</td> <td>30H-39H</td> <td>48-57</td> <td>1-5byte</td> </tr> <tr> <td>Separator</td> <td>1FH</td> <td>31</td> <td>1byte</td> </tr> <tr> <td>Fixed Value</td> <td>31H</td> <td>49</td> <td>1byte</td> </tr> <tr> <td>Separator</td> <td>1FH</td> <td>31</td> <td>1byte</td> </tr> <tr> <td>Other Information</td> <td>30H or 31H</td> <td>48 or 49</td> <td>1byte</td> </tr> <tr> <td>NUL</td> <td>00H</td> <td>0</td> <td>1byte</td> </tr> </tbody> </table> <p>L and H data transmit graph: use dot for unit. Other information data transmit: “Hexadecimal=30H/Decimal=48”: Data is not printed. “Hexadecimal=31H/Decimal=49”: Data is not printed.</p>				Transmit data	Hexadecimal	Decimal	Data type	Header	37H	55	1byte	Flag	36H	54	1byte	Width	30H-39H	48-57	1-5byte	Separator	1FH	31	1byte	Height	30H-39H	48-57	1-5byte	Separator	1FH	31	1byte	Fixed Value	31H	49	1byte	Separator	1FH	31	1byte	Other Information	30H or 31H	48 or 49	1byte	NUL	00H	0	1byte
Transmit data	Hexadecimal	Decimal	Data type																																													
Header	37H	55	1byte																																													
Flag	36H	54	1byte																																													
Width	30H-39H	48-57	1-5byte																																													
Separator	1FH	31	1byte																																													
Height	30H-39H	48-57	1-5byte																																													
Separator	1FH	31	1byte																																													
Fixed Value	31H	49	1byte																																													
Separator	1FH	31	1byte																																													
Other Information	30H or 31H	48 or 49	1byte																																													
NUL	00H	0	1byte																																													
Parameter range	pL=3, pH=0 cn=49 fn=82 m=48																																															
Default	None																																															
Notes	This command do not print two-dimension bar code graph. Users must consider two-dimension bar code graph space.																																															
Example	None																																															

Name	Setting two-dimension bar code graph information
------	--

Printing double Two-dimension bar code

Name	Printing double two-dimension bar code
Code	ASCII : US Q m n p1H p1L l1H l1L ecc1 v1 d1...dn p2H p2L l2H l2L ecc2 v2 dk...dm DEC : 27 81 m n p1H p1L l1H l1L ecc1 v1 d1...dn p2H p2L l2H l2L ecc2 v2 dk...dm HEX : 1F 51 m n p1H p1L l1H l1L ecc1 v1 d1...dn p2H p2L l2H l2L ecc2 v2 dk...dm
Function	Printing double two-dimension bar code
Range	QR code numbers: 0<m>3 QR code size: n(1~8) P1H,p1L specify the location of QR1: (p1H*256+p1L) L1H,l1L specify the data length of QR1: (l1H*256+l1L) Ecc1 specify error correction level about QR1: (0:7%, 1:15%,2:25%,3:30%) V1 specify QR1 version of the symbol.(1~40, 0:auto size) D1...d2 as the data of QR1; P2H,p2L specify the location of QR2: (p2H*256+p2L) L2H,l2L specify the data length of QR2: (l2H*256+l2L) Ecc2 specify error correction level about QR2: (0:7%, 1:15%,2:25%,3:30%) V2 specify QR2 version of the symbol.(1~40, 0:auto size) Dk...dm as the data of QR2
Default	None
Notes	If module size is bigger than printing width, the QR data will be treated as normal data
Example	To Print string “0123456789” in QR Code at position 32 with ecc 1 and Print string “987654321” in QR Code at position 192 with ecc 2, and module size 3, you should send command as follow. 1f 51 02 03 00 20 00 0a 01 06 30 31 32 33 34 35 36 37 38 39 00 C0 00 0a 02 00 39 38 37 36 35 34 33 32 31 30

⑦Status querying Commands

Real-time transmission status

Name	Real-time transmission status
Code	ASCII : DLE EOT n DEC : 16 4 n HEX : 10 04 n
Function	According to below parameters, transit the real-time status of printer,n

	stands for printer status: N=1:transmit printer status N=2:transmit off-line status N=3:transmit error status N=4:transmit paper sensor status																																																																																																								
Range	$1 \leq n \leq 4$																																																																																																								
Default	None																																																																																																								
Support	All																																																																																																								
Notes	<ul style="list-style-type: none"> Printer return to the relative status immediately after receiving the command this command try not to put in command list between 2 or more bite . Though printer being forbid by ESC=,this command still effective. Printer transmit current situation ,each situation show by 1 bite data. It is not sure host computer will receive printer transmit situation. Printer executed immediately after received the command. <p>The command only effective for serial printer. Printer start to work immediately after receiving this command at any situation.</p> <p>n=1: printer status</p> <table border="1"> <thead> <tr> <th>Bit</th><th>0/ 1</th><th>Hexadecim al</th><th>decimalis m</th><th>Function</th></tr> </thead> <tbody> <tr> <td>0</td><td>0</td><td>00</td><td>0</td><td>Fixed to be 0</td></tr> <tr> <td>1</td><td>1</td><td>02</td><td>2</td><td>Fixed to be 1</td></tr> <tr> <td rowspan="2">2</td><td>0</td><td>00</td><td>0</td><td>Two drawers kick(no drawer, fixed to be 0)</td></tr> <tr> <td>1</td><td>04</td><td>4</td><td>Turn off two cashbox</td></tr> <tr> <td rowspan="2">3</td><td>0</td><td>00</td><td>0</td><td>On-line</td></tr> <tr> <td>1</td><td>08</td><td>8</td><td>Off-line</td></tr> <tr> <td>4</td><td>1</td><td>10</td><td>16</td><td>Fixed to be 1</td></tr> <tr> <td>5,6</td><td></td><td>--</td><td>--</td><td>undefined</td></tr> <tr> <td rowspan="2">7</td><td>0</td><td>00</td><td>00</td><td>The paper has been torn away</td></tr> <tr> <td>1</td><td>80</td><td>96</td><td>The paper hasn't been torn away</td></tr> </tbody> </table> <p>n=2: transit off-line status</p> <table border="1"> <thead> <tr> <th>bite</th><th>0 / 1</th><th>Hexadecim al</th><th>decimalism</th><th>Function</th></tr> </thead> <tbody> <tr> <td>0</td><td>0</td><td>00</td><td>0</td><td>Fixed to be 0</td></tr> <tr> <td>1</td><td>1</td><td>02</td><td>2</td><td>Fixed to be 1</td></tr> <tr> <td rowspan="2">2</td><td>0</td><td>00</td><td>0</td><td>Turn off upper cover</td></tr> <tr> <td>1</td><td>04</td><td>4</td><td>Open upper cover</td></tr> <tr> <td rowspan="2">3</td><td>0</td><td>00</td><td>0</td><td>Not press feed key</td></tr> <tr> <td>1</td><td>08</td><td>8</td><td>press feed key</td></tr> <tr> <td>4</td><td>1</td><td>10</td><td>16</td><td>Fixed to be 1</td></tr> <tr> <td rowspan="2">5</td><td>0</td><td>00</td><td>0</td><td>Paper adequate</td></tr> <tr> <td>1</td><td>20</td><td>32</td><td>Paper shortage</td></tr> <tr> <td>6</td><td>0</td><td>00</td><td>00</td><td>No error</td></tr> </tbody> </table>	Bit	0/ 1	Hexadecim al	decimalis m	Function	0	0	00	0	Fixed to be 0	1	1	02	2	Fixed to be 1	2	0	00	0	Two drawers kick(no drawer, fixed to be 0)	1	04	4	Turn off two cashbox	3	0	00	0	On-line	1	08	8	Off-line	4	1	10	16	Fixed to be 1	5,6		--	--	undefined	7	0	00	00	The paper has been torn away	1	80	96	The paper hasn't been torn away	bite	0 / 1	Hexadecim al	decimalism	Function	0	0	00	0	Fixed to be 0	1	1	02	2	Fixed to be 1	2	0	00	0	Turn off upper cover	1	04	4	Open upper cover	3	0	00	0	Not press feed key	1	08	8	press feed key	4	1	10	16	Fixed to be 1	5	0	00	0	Paper adequate	1	20	32	Paper shortage	6	0	00	00	No error
Bit	0/ 1	Hexadecim al	decimalis m	Function																																																																																																					
0	0	00	0	Fixed to be 0																																																																																																					
1	1	02	2	Fixed to be 1																																																																																																					
2	0	00	0	Two drawers kick(no drawer, fixed to be 0)																																																																																																					
	1	04	4	Turn off two cashbox																																																																																																					
3	0	00	0	On-line																																																																																																					
	1	08	8	Off-line																																																																																																					
4	1	10	16	Fixed to be 1																																																																																																					
5,6		--	--	undefined																																																																																																					
7	0	00	00	The paper has been torn away																																																																																																					
	1	80	96	The paper hasn't been torn away																																																																																																					
bite	0 / 1	Hexadecim al	decimalism	Function																																																																																																					
0	0	00	0	Fixed to be 0																																																																																																					
1	1	02	2	Fixed to be 1																																																																																																					
2	0	00	0	Turn off upper cover																																																																																																					
	1	04	4	Open upper cover																																																																																																					
3	0	00	0	Not press feed key																																																																																																					
	1	08	8	press feed key																																																																																																					
4	1	10	16	Fixed to be 1																																																																																																					
5	0	00	0	Paper adequate																																																																																																					
	1	20	32	Paper shortage																																																																																																					
6	0	00	00	No error																																																																																																					

		1	40	64	Error
7	0	00	0		Fixed to be 0
n=3: transmit error status					
bit e	0 / 1	Hexadecim al	decimalis m	Function	
0	0	00	0	Fixed to be 0	
1	1	02	2	Fixed to be 1	
2		--	--	Undefined	
3	0	00	0	No cutter error	
	1	08	8	Cutter error	
4	1	10	16	Fixed to be 1	
5	0	00	0	No unrecoverable error	
	1	20	32	Unrecoverable error	
6	0	00	00	Printer head temp and voltage are normal	
	1	40	64	Printer head temp and voltage are exceed	
7	0	00	0	Fixed to be 0	
Unrecoverable error: abnormal input voltage					
Automatic recovery error: refers to the printing head overheating error.					
When the printing head overheating error occurs, wait for a period of time. When the printing head temperature drops, the error will be automatically recovered.					
n=4: paper sensor status					
bit e	0 / 1	Hexadecim al	decimalis m	Function	
0	0	00	0	Fixed to be 0	
1	1	02	2	Fixed to be 1	
2,	0	00	0	Paper	
3	1	0C	12	Paper near-end	
4	1	10	16	Fixed to be 1	
5,	0	00	0	Paper	
6	1	60	96	Paper end	
7	0	00	0	Fixed to be 0	
Example	10 04 01 10 04 02 10 04 03 10 04 04				

⑧Other commands

Printer reset

Name	Printer reset
Code	ASCII : ESC @ Decimal : 27 64

	Hex : 1B 40
Function	The ESC @ command initializes the printer as following: This command prints the data contained in the print buffer, and initializes various setup items. Restore default values for each parameter
Range	None
Default value	None
Notes	None
Example	None

Print self-test page

Name	Print self-test page
Code	ASCII : DC2 T Decimal : 18 84 Hex : 12 54
Function	Printing a self-test page which including firmware version,interface,co depage and other some information
Range	None
Default value	None
Notes	None
Example	1B 40 12 54

paper cut

Name	paper cut								
Code	(1) ASCII : GS V m Decimal : 29 86 m Hex : 1D 56 m (2) ASCII : GS V m n Decimal : 29 86 m n Hex : 1D 56 m n								
Function	This command executes paper cutting The relationship between parameter m and the cut mode is as follows: <table border="1"> <tr> <td>M</td> <td>Mode</td> </tr> <tr> <td>0, 48</td> <td>Full cut</td> </tr> <tr> <td>1, 49</td> <td>Partial cut</td> </tr> <tr> <td>65,66</td> <td>Feed paper and cut</td> </tr> </table>	M	Mode	0, 48	Full cut	1, 49	Partial cut	65,66	Feed paper and cut
M	Mode								
0, 48	Full cut								
1, 49	Partial cut								
65,66	Feed paper and cut								
Range	(1) m = 0, 48, 1, 49 (2) m = 66, 0 ≤ n ≤ 255								
Default value	None								
Notes	This command is valid only at the beginning of the line								

	<ul style="list-style-type: none"> • m = 0, 48, 1, 49, Printer cut paper directly. • m = 65,66, Feeds paper to[The distance between the print position and the cutter + n × (vertical motion unit)]and cuts the paper • Moving units horizontally and vertically are set by the GS p command • The feed volume is calculated by moving units vertically.
Example	1B 40 30 30 30 0D 0A 1D 56 00 30 30 30 0D 0A 1D 56 01 30 30 30 0D 0A 1D 56 42 00

Full cut

Name	Full cut
Code	ASCII : ESC i Decimal : 27 105 Hex : 1B 69
Function	Full cut mode
Range	None
Default value	None
Notes	None
Example	1B 40 30 30 30 0D 0A 1B 69

Partial cut

Name	Partial cut
Code	ASCII : ESC m Decimal : 27 109 Hex : 1B 6D
Function	Partial cut mode
Range	None
Default value	None
Notes	None
Example	1B 40 30 30 30 0D 0A 1B 6D