


Temperature Compensated Crystal Oscillators [TCXO " M " and VCTCXO " VM "]

TCXO			VCTCXO			N series	SMD	2.5 V	3.3 V	Min. 10 MHz	Max. 1,500 MHz
MQN _ T	MQN _ P	MQN _ D	VMQN _ T	VMQN _ P	VMQN _ D						

Features

0.8 pS Phase Jitter (typical)



The (V)MQN__T, (V)MQN__P and (V)MQN__D Series are members of Mercury's Q-Family Quick-Turn Temperature Compensated oscillators that can be delivered within days. With low current consumption (44 mA for PECL 212.500 MHz at 3.3V) and an integrated phase jitter performance of 0.8 pS RMS, they have gained its precision frequency control market position by providing engineers with few-day samples for prototypes and low cost, fast delivery for volume production .

General specifications , at Ta=+25°C

Model	(V)MQN574T , (V)MQN576T		(V)MQN576P			(V)MQN576D		
Output Logic	CMOS		PECL			LVDS		
Supply Voltage V _{DD} (code)	+ 2.5 V _{DD} ± 5% (voltage code " 25 ") + 3.3 V _{DD} ± 5% (voltage code " 33 ")		+ 2.5 V _{DD} ± 5% (voltage code " 25 ") + 3.3 V _{DD} ± 5% (voltage code " 33 ")			+ 2.5 V _{DD} ± 5% (voltage code " 25 ") + 3.3 V _{DD} ± 5% (voltage code " 33 ")		
Available Frequency Range	10 ~ 250 MHz		10 ~ 1,500 MHz			10 ~ 1,500 MHz		
Output Load	15 pF		50 Ω into V _{cc} - 2V or Thevenin equivalent			100 Ω		
Output Logic " High " , " 1 "	90 % V _{DD}		V _{DD} - 1.03 (min.) , V _{DD} - 0.6 (max.)			1.4 V (typ.) , 1.6 V (max.)		
Output Logic " Low " , " 0 "	10 % V _{DD}		V _{DD} - 1.85 (min.) , V _{DD} - 1.6 (max.)			1.1 V (typ.) , 0.9 V (min.)		
(V _{DD} = + 2.5V)	50 MHz : 34 mA		156 MHz : 46 mA			156 MHz : 32 mA		
Current Consumption (max.)	125 MHz : 38 mA		600 MHz : 50 mA			800 MHz : 40 mA		
	200 MHz : 40 mA		1,000 MHz : 60 mA			1,000 MHz : 44 mA		
(V _{DD} = + 3.3V)	50 MHz : 36 mA		156 MHz : 50 mA			156 MHz : 35 mA		
Current Consumption (max.)	125 MHz : 40mA		600 MHz : 55 mA			800 MHz : 40 mA		
	200 MHz : 44 mA		1,000 MHz : 62 mA			1,000 MHz : 44 mA		
Current with Output Disabled	18 mA (typ.)		18 mA (typ.)			18 mA (typ.)		
Rise Time / Fall Time	1.5 nsec. (typ.) , 3.0 nsec. (max.) Tr / Tf : 10% ↔ 90% waveform		0.2 nsec. (typ.) , 0.5 nsec. (max.) Tr / Tf : 20% ↔ 80% waveform			0.2 nsec. (typ.) , 0.4 nsec. (max.) Tr / Tf : 20% ↔ 80% waveform		
Initial Calibration Tolerance	±2.0 ppm. (max.) at +25°C±2°C. (upon shipment)							
Frequency Stability Codes	Temperature (ref to +25°C)		± 2.5 ppm over -30°C to +85°C (default) ± 1.0 ppm over -40°C to +85°C (available)					
	Aging at Ta = +25°C		± 1.0 ppm max . , per year at 25°C					
	Voltage Change		± 0.2 ppm max . , for a ±5% input voltage change.					
	Load Change		± 0.2 ppm max . , for a ±10% load condition change.					
	Reflow		± 1.0 ppm max . , 1 reflow and measured 24 hours afterwards.					
Duty Cycle	50 % ± 5%							
Start-up Time	5.0 msec. (max.)							
RMS Jitter [12 kHz ~ 20 MHz]	0.8 psec (typ.)							
Phase Noise [dBc / Hz (typical)]	Offset	10 Hz	100 Hz	1K Hz	10K Hz	100K Hz	1M Hz	10M Hz
	125 MHz	-51	-93	-111	-123	-125	-135	-155
	212.5 MHz	-42	-87	-105	-115	-118	-130	-151
	312.5 MHz	-49	-88	-107	-111	-114	-124	-147
Storage Temperature	-55°C to + 150°C							

Control Voltage Function on Pad 1		Output Enable Function on pad 2	
Control Voltage Center and Range	+1.5V ± 1.0V for both V _{DD} = 2.5V and 3.3V	OE Control on Pad 2	70% of V _{DD} (min.) to enable output. (Open connection prohibit.)
Frequency Pulling Range	± 8 ppm (min.)		30% of V _{DD} (max.) to disable output (high impedance).
Linearity	± 1 % (typ.) ± 10% (max.)		
Transfer Function	Positive Transfer		
Absolute Voltage	4.0 V (max.)	Output Enable Time / Disable Time	200 nsec. (max.) / 50 nsec. (max.)
Input Impedance	770 KΩ (typ.)		

Mercury www.mercury-crystal.com ■Taiwan : Tel: (+886)-2-2406-2779 / sales-tw@mercury-crystal.com

■USA : Tel: (+1)-909-466-0427 / sales-us@mercury-crystal.com ■China : Tel: (+86)-512-5763-8100 / sales-cn@mercury-crystal.com

Temperature Compensated Crystal Oscillators [TCXO " M " and VCTCXO " VM "]


TCXO			VCTCXO			N series	SMD	2.5 V 3.3 V	Min. 10 MHz	Max. 1,500 MHz
MQN _ T	MQN _ P	MQN _ D	VMQN _ T	VMQN _ P	VMQN _ D					
CMOS	PECL	LVDS	CMOS	PECL	LVDS					

Part Number Format and Example


Example :
 1.VMQN574T33 - 120.000 - 2.5 / -40+85
 2.VMQN576P33 - 120.000 - 2.5 / -40+85

VMQN	574	T	33	-	120.000	-	2.5	/	-40+85
Hold Type	Package		Supply Voltage		Center Freq. (MHz)		Freq. Stability		Operating Temperature Range
" MQN " : TCXO	" 574 " 4pad (5.0 * 7.0 mm)	T : CMOS	" 33 " for 3.3V " 25 " for 2.5V						
" VMQN " : VCTCXO									
VMQN	576	P	33	-	120.000	-	2.5	/	-40+85
Hold Type	Package		Supply Voltage		Center Freq. (MHz)		Freq. Stability		Operating Temperature Range
" MQN " : TCXO	" 576 " 6pad (5.0 * 7.0 mm)	T : CMOS P : PECL D : LVDS	" 33 " for 3.3V " 25 " for 2.5V						
" VMQN " : VCTCXO									

Outline Dimensions (Unit : mm) , Suggested pad Layout for SMDs

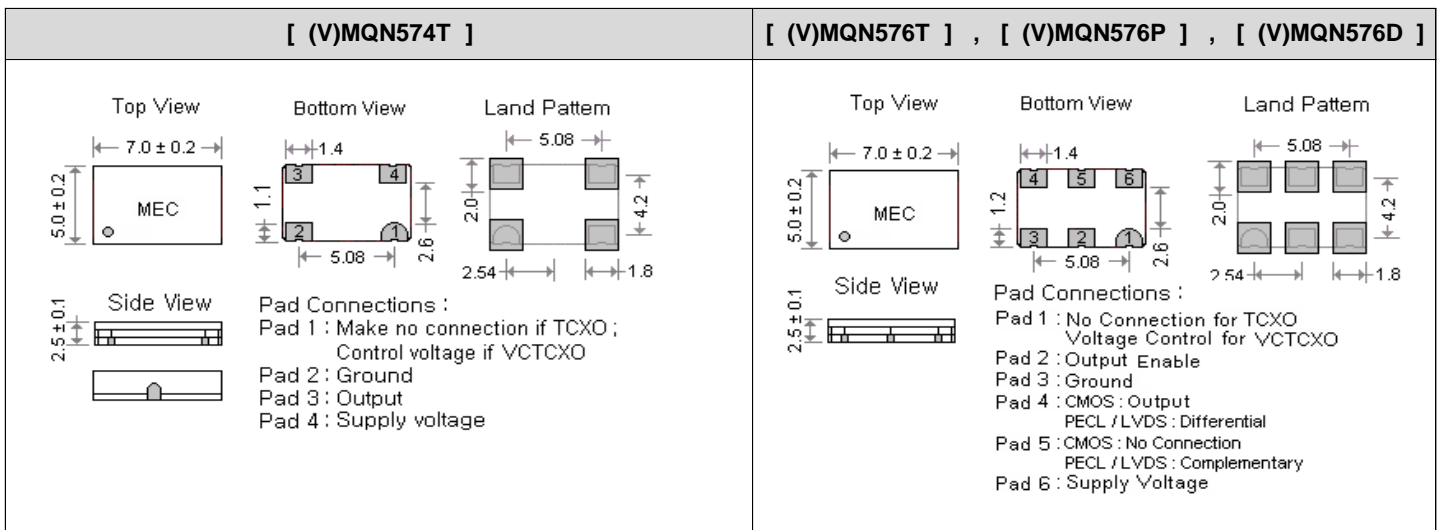


Test Circuits and Output Waveforms

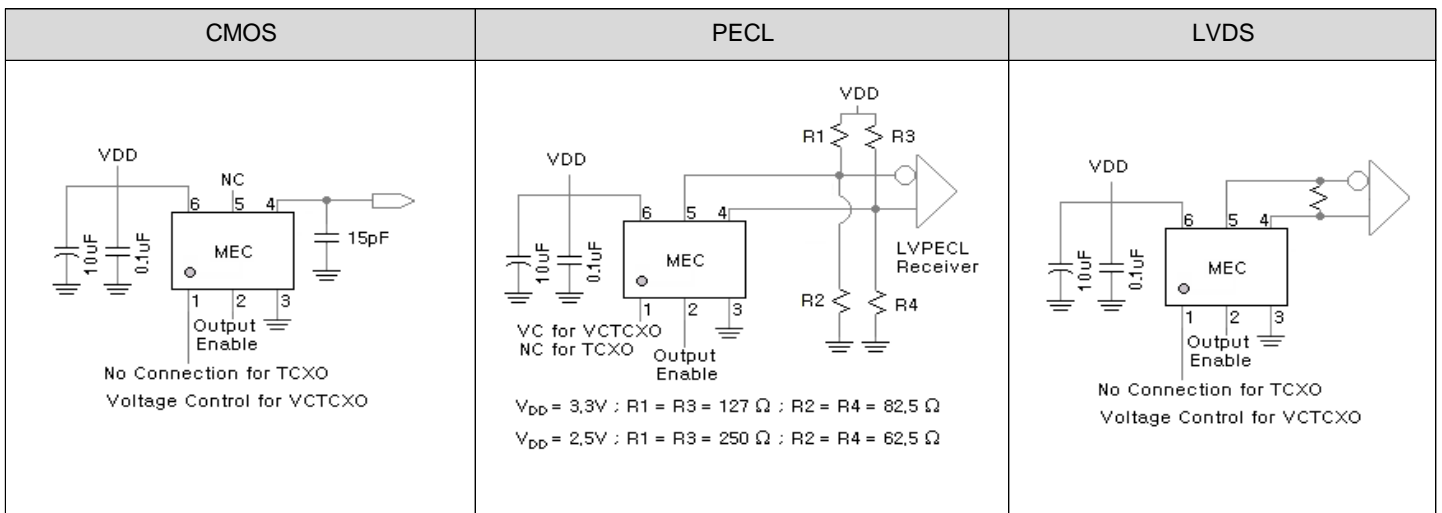

Emboss Taping and Reel Specifications

[VCXO]

[(VC)TCXO]

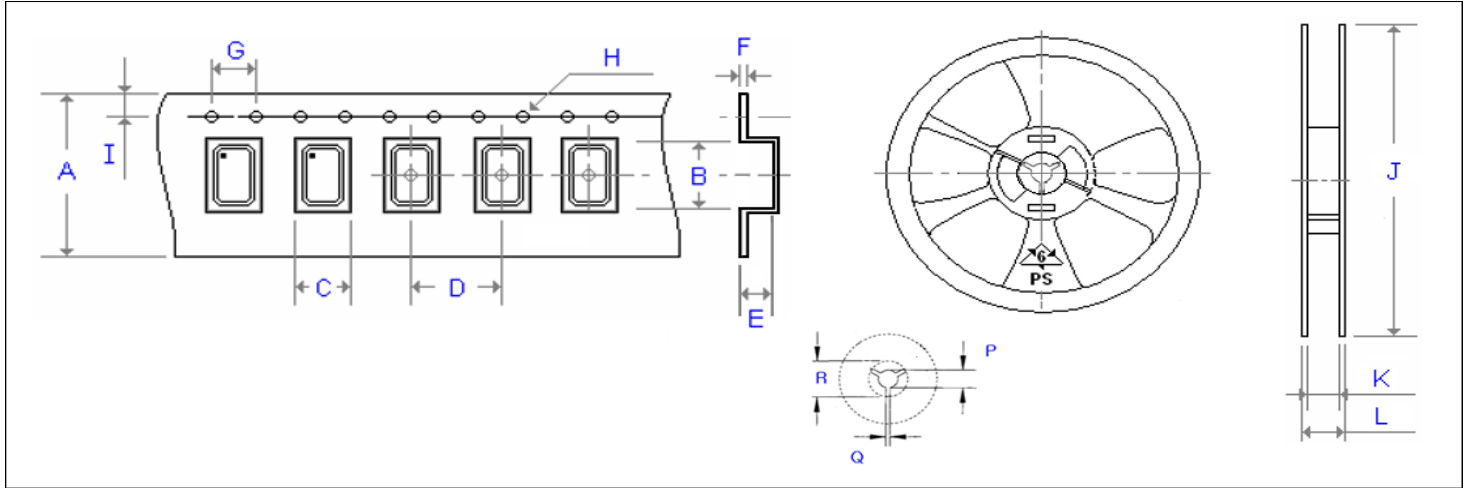

Carrier Type Dimensions (unit : mm) ±0.3mm

	A	B	C	D	E	F	G	H	I	pcs / reel
G_226	8.00	2.80	2.25	4.00	1.10	0.30	4.00	∅ 1.50	1.75	3000
G_326	8.00	3.40	2.70	4.00	1.40	0.25	4.00	∅ 1.50	1.75	3000
G_534	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
G_576	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
G_43	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500
G_63	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500
G_JF538	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
G_JF578	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
(V)M21	8.00	2.30	1.90	4.00	0.90	0.25	4.00	∅ 1.50	1.75	3000
(V)ME21	8.00	2.30	1.50	4.00	1.35	0.25	4.00	∅ 1.50	1.75	3000
(V)M22	8.00	2.80	2.25	4.00	1.10	0.30	4.00	∅ 1.50	1.75	3000
(V)M_32	8.00	3.71	2.80	4.00	1.75	0.25	4.00	∅ 1.50	1.75	3000
(V)MQ_326	12.00	3.60	2.90	4.00	1.70	0.30	4.00	∅ 1.50	1.75	3000
(V)M_53	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
(V)M_57(2)	16.00	7.40	5.50	8.00	2.80	0.35	4.00	∅ 1.50	1.75	500
(V)M_43 (63)	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500

Reel Dimensions (unit : mm) ±2mm

	J	K	L	P	Q	R	pcs / reel
G_226	180.00	8.40	11.40	13.00	2.50	20.20	3000
G_326	180.00	9.00	12.00	13.00	2.50	20.20	3000
G_534	180.00	13.00	16.00	13.00	2.50	20.20	1000
G_576	180.00	17.20	19.30	13.00	2.50	20.20	1000
G_43	330.00	24.50	29.10	13.00	2.50	20.20	500
G_63	330.00	24.50	29.10	13.00	2.50	20.20	500
G_JF538	180.00	13.00	16.00	13.00	2.50	20.20	1000
G_JF578	180.00	17.20	19.30	13.00	2.50	20.20	1000
(V)M21	180.00	8.40	11.40	13.00	2.50	20.20	3000
(V)ME21	180.00	9.00	12.00	13.00	2.50	20.20	3000
(V)M22	180.00	8.40	11.40	13.00	2.50	20.20	3000
(V)M_32	180.00	9.00	11.40	13.00	2.50	20.20	3000
(V)MQ_326	180.00	13.00	16.00	13.00	2.50	20.20	3000
(V)M_53	180.00	13.00	16.00	13.00	2.50	20.20	1000
(V)M_57(2)	180.00	17.20	19.30	13.00	2.50	20.20	500
(V)M_43 (63)	330.00	24.50	29.10	13.00	2.50	20.20	500

Mercury www.mercury-crystal.com ■Taiwan : Tel: (+886)-2-2406-2779 / sales-tw@mercury-crystal.com

■USA : Tel: (+1)-909-466-0427 / sales-us@mercury-crystal.com ■China : Tel: (+86)-512-5763-8100 / sales-cn@mercury-crystal.com