


NOTES:

1.MATERIAL:

- 1.1 Housing:Thermoplastic plastics
- 1.2 Contact:Copper Alloy
- Au plated on contact area
- Tin plating on solder tail
- Nickel under plating over all
- 1.3 Shell:Copper Alloy
- Nickel plating over all

2.characteristics:

- 2.1 Rating Voltage : 125V AC RMS
  - 2.2 Rating Current:500 mA
  - 2.3 Contact Resistance:45 mΩ MAX.
  - 2.4 Insulation Resistance:100 MΩ MIN.
  - 2.5 Withstanding Voltage:AC 500V between adjacent contacts
  - 2.6 Mating force: 22N/2.27KG Max
  - 2.7 Extraction force:22N/2.27KG Max
  - 2.8 Life test:750Cycles MIN.
  - 2.9 Temperature Range: -30°C~+80°C.
- The product must be compliance ROHS

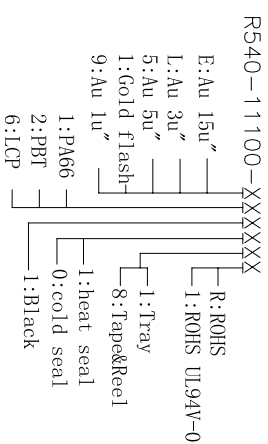

TOLERANCE UNLESS OTHERWISE SPECIFIED	OTHERWISE SPECIFIED
XXX ±0.10	X' ±3
XX ±0.20	XX' ±2
X ±0.30	.XX' ±2

**HLW** 深圳市华联威电子科技有限公司  
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.

PART NAME: R145 8P8C SMT 1\*1PORT 扁针无灯

PART No: R540-11100-XXXXXX

PROJECTION: UNIT: SCALE SHEET REV.

DATE: 2014.10.11 mm 1:1 10F1 A

REV.	ECH. NO.	APPD.
A	/	LXQ