


KDC-A11型電源開關系列 Power switch series

◆ 特點和用途 Characteristics and usage

- 具有快速動作的特點
Quick action
- 扁平形，結構緊湊，體積小。
Flat type, tight configuration, small volume.
- 可承受大電流和浪涌電流
Endure big current and inrush current
- 通過UL、VDE等國際安全認證
UL, VDE approvals
- 廣泛應用於彩電、音頻裝置、計算機及外圍設備，儀器儀表、電子設備等。
Widely used in color TV, audio device, computer and its peripheral equipment, apparatus and instrument, electronic equipment etc.

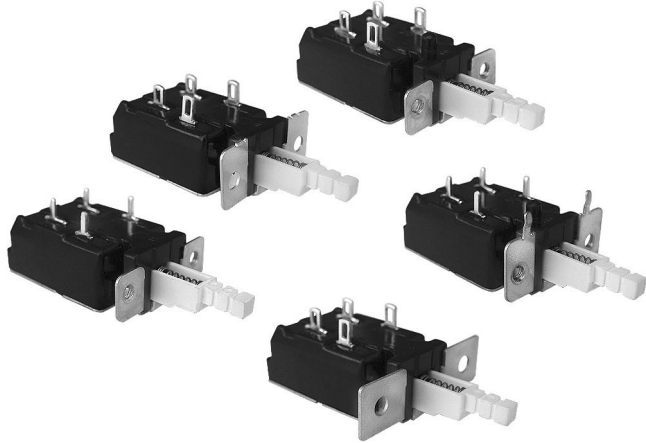

◆ 技術特性 Specifications

項目 Item		特性值 Value
環境溫度 Environment temperature		-10 ~ +85℃
相對濕度 Relative humidity		95%,40℃
額定電流 Rated current		4A/128A,8A/128A
額定電壓 Rated voltage		AC250V
工作行程/全行程 Operating travel/full travel		2.5mm/3.5mm
動作力 Operating force		3.5 ~ 7.5N
電路 Circuit		雙刀單擲 DPST
絕緣電阻 Insulation resistance		≥100MΩ
接觸電阻 Contact resistance		≤50mΩ
耐電壓 Test voltage	同極不相接端子間 Between each terminals of the same polarity	AC2000V
	帶電金屬零件與地(外殼)之間、接綫端與不帶電金屬件之間 Between current-carrying metal parts and ground(case),and between each terminal and non-current-carrying metal parts.	AC4000V
電氣壽命 Electrical life		10,000次/cycles
質量 Weight		約 12.1g Approx. 12.1g
安全認證 Safety approvals		UL、CUL、VDE、SEMKO、DEMKO、NEMKO、FIMKO、CE、EK、CQC