

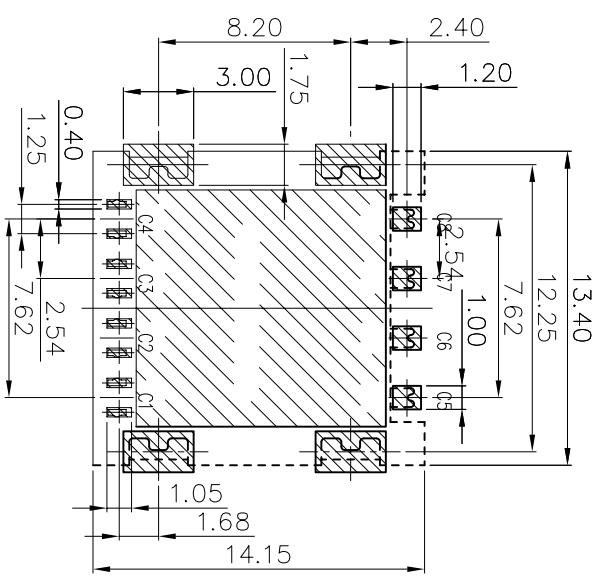
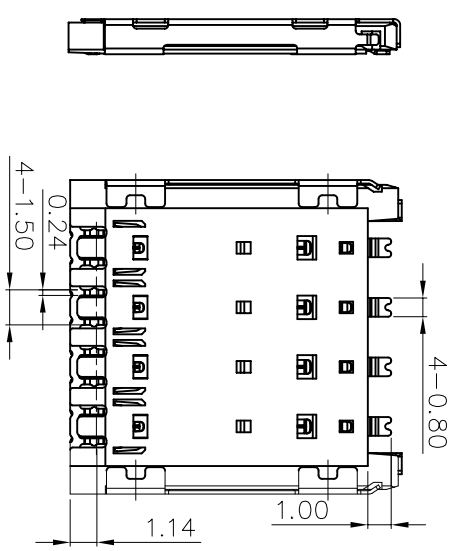
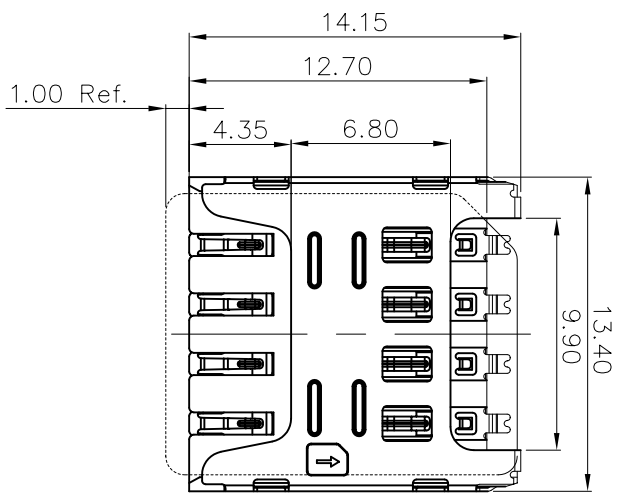
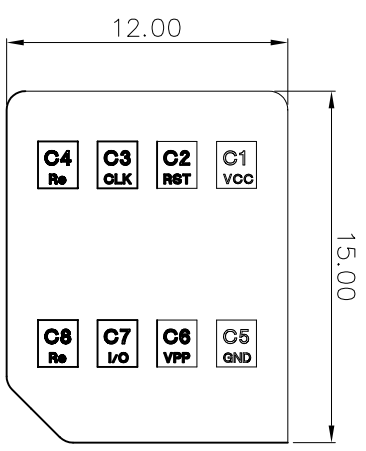


REV. A	DATE 2017/01/10	ECN NO. /	MODIFICATION NEW	APPROVER Vicky
--------	-----------------	-----------	------------------	----------------



P.C.B layout

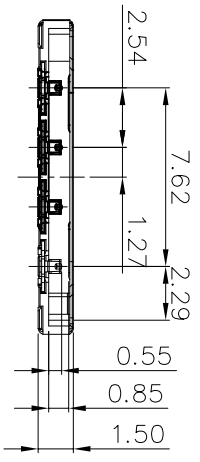

- NOTES:
- Contact Resistance: 50mohm MAX
  - Insulation Resistance: 1000Mohm MIN 500V DC
  - Dielectric withstanding voltage: 500V AC.
  - Durability: 5000 Cycles
  - Positive forces: 0.2-0.9 N 0.76 mm thick
  - Terminal retention: 4.5 N Min

GENERAL TOLERANCE		UNITS mm		NAME: SIM CARD		TITLE: MICRO SIM CARD 8P SMT H=1.5mm	
SELECT	✓			PART NO:	SI61C-08200	DWG NO:	ATOM-A03325
ON TOL	1	2	3	FINISH	Q'TY	CHKD:	Doris
X.XXX	±0.08	±0.15		APPD:	Vicky	DR:	Cmy
X.XX	±0.20	±0.13	±0.25				
X.X	±0.25	±0.25	±0.50				
X.	±0.35	±0.38	±1.00				
ANGLE	±2°						

NO.	product	QTY	spec
1	Housing		HIGH THERMOPLASTIC, UL 94 V-0, BLACK
2	Contact	8	COPPER ALLOY, Gold Flash on Contact Solder Area; Over Nickel Plating
3	Shell	1	SUS, Gold Flash on Contact Solder Area; Over Nickel Plating

**ATOM** 深圳市爱特姆科技有限公司  
SHENZHEN ATOM TECHNOLOGY CO., LTD.

