
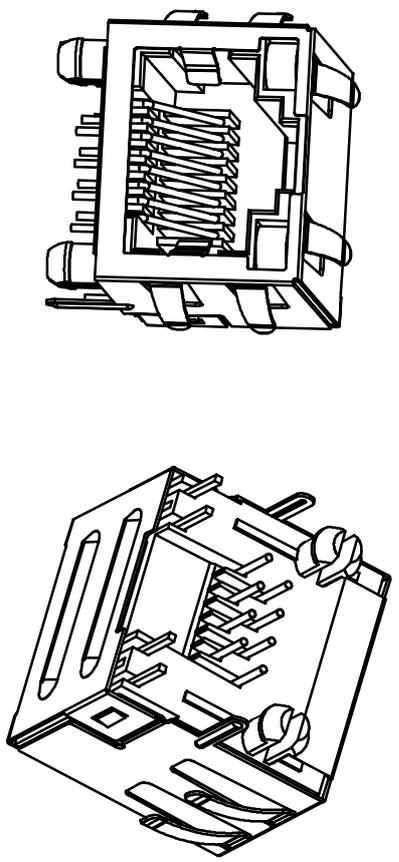


1 2 3 4 5 6 7 8 9 10 11

YELLOW LED GREEN LED

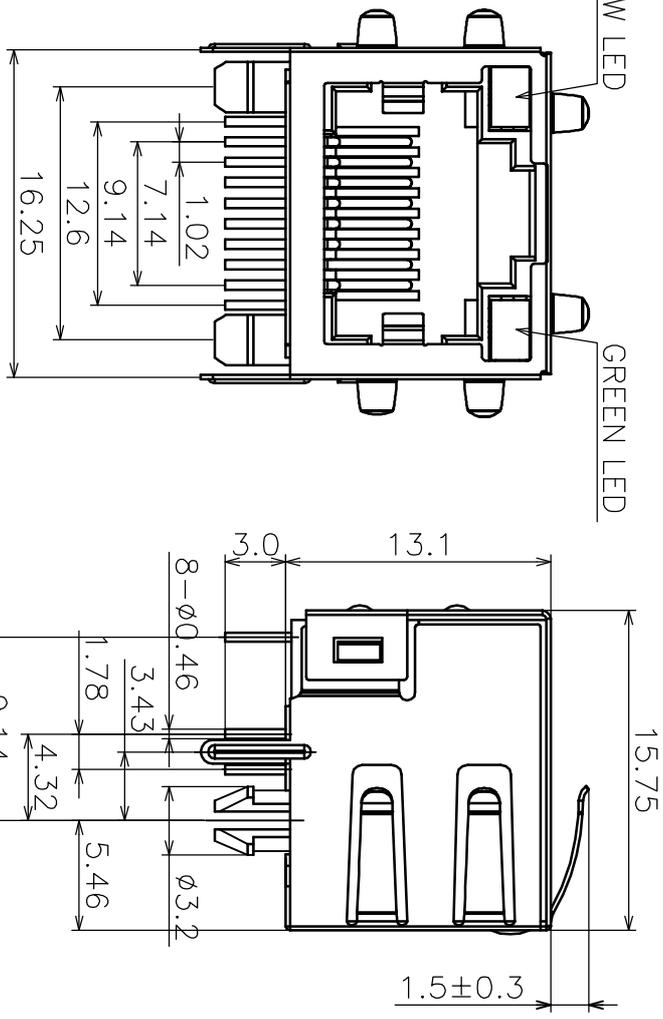


技术参数 (SPECIFICATION):

- 温度范围 (TEMPERATURE RANGE): -40~+70℃
- 额定电压 (VOLTAGE RATING): 125V
- 额定电流 (CURRENT RATING): 1.5A
- 接触电阻 (CONTACT RESISTANCE): $\leq 30m\Omega$
- 绝缘电阻 (INSULATION RESISTANCE): $\geq 500M\Omega$
- 耐压 (DIELECTRIC STRENGTH): 1000V AC/(50HZ)/Min
- 插拔力 (MATING AND UNMATING FORCE): 3~20N
- 寿命 (DURABILITY): 750 CYCLES MIN

材料 (MATERIAL):

- 基座 (HOUSING): PA46/PBT UL94V-0
- 插针 (CONTACT): PHOSPHOR BRONZE ø0.46mm
- 镀层 (PLATING): GOLD PLATING OVER NICKEL, THICKNESS IS OPTIONAL
- 外壳 (SHIELD): COPPER ALLOY t=0.2mm PLATING NICKEL
- 脚灯 (THE COLOR IS OPTIONAL)

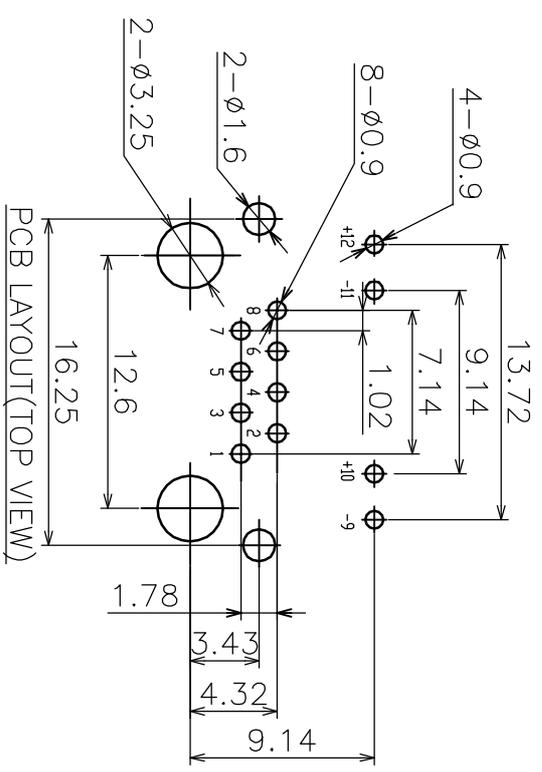

PCB LAYOUT(TOP VIEW)
RECOMMENDED

HLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO., LTD.

一般公差	±0.25	品名:	RJ45 带灯带弹
30~	±0.20	料号:	黄
10~30	±0.20	型号:	
~10	±0.15	图号:	
角度:	±2°	版本:	
页面:	1 of 1	单位:mm	
		比例: 1:1	规格: A4

日期: 日期: 日期: 日期:

绘图: 审核: 审核: 审核:

日期: 日期: 日期: 日期:

变更单号 绘制 日期 核准

版次 1 2 3

