由 Foxit PDF Editor 编辑
版权所有 (c) by Foxit Software Company, 2003 - 2009
仅用于评估。

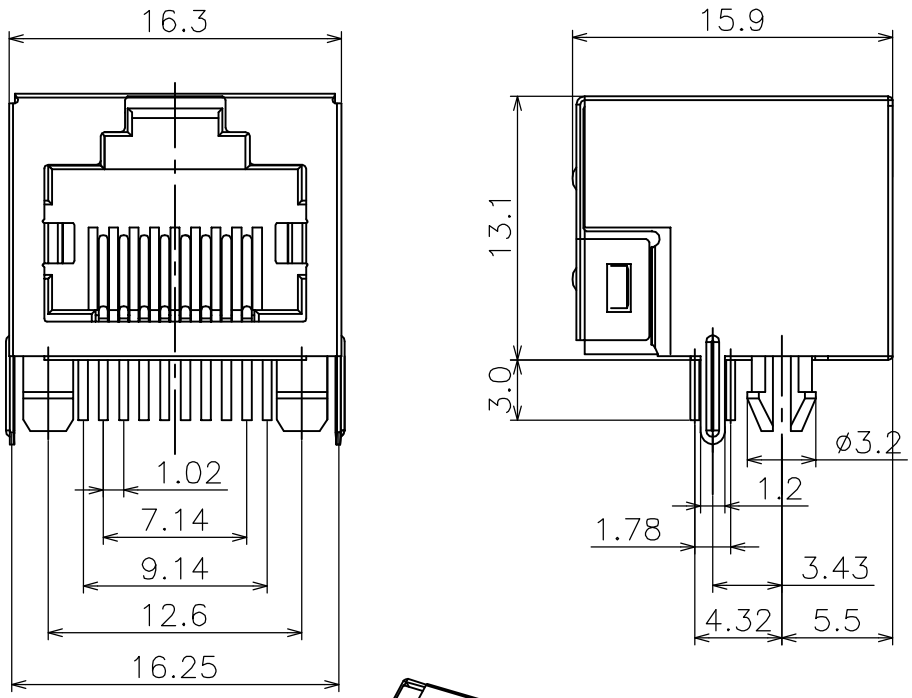


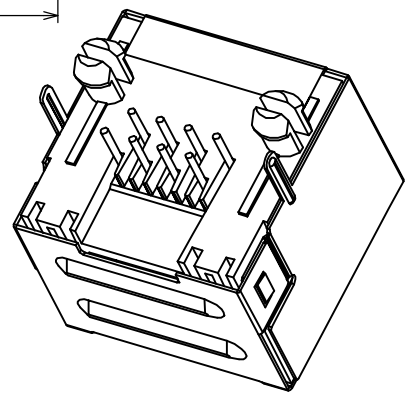

技术参数 (SPECIFICATION):

温度范围 (TEMPERATURE RANGE):-40～+70℃
额定电压 (VOLTAGE RATING):125V
额定电流 (CURRENT RATING):1.5A
接触电阻 (CONTACT RESISTANCE):≤30mΩ
绝缘电阻 (INSULATION RESISTANCE):≥500MΩ
耐 压 (DIELECTRIC STRENGTH):1000V AC/(50HZ)/Min
插拔力 (MATING AND UNMATING FORCE):3～20N
寿 命 (DURABILITY):750 CYCLES MIN

材 料 (MATERIAL):

塑 座 (HOUSING):PBT/PA46 UL94V-0
插 针 (CONTACT):PHOSPHOR BRONZE ø0.46mm
镀 层 (PLATING):GOLD PLATING OVER NICKEL
外 壳 (SHIELD):COPPER ALLOY PLATED NICKEL

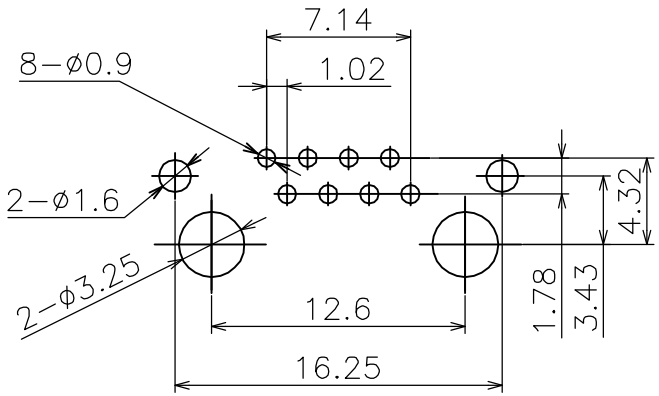


PCB LAYOUT
RECOMMENDED

| | | | | | |
|---|---|---|---|---|---|
| A/0 | 版 | | | | |
| 版 次 | | 变 更 单 号 | 绘 制 | 日 期 | |

网络插座外形图

| | | | |
|---|---|---|---|
| 绘 图: | | 日 期: | |
| 审 核: | | 日 期: | |
| 核 准: | | 日 期: | |

HLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO; LTD.

| 一 般 公 差 | |
|---|---|
| 30～ | ±0.25 |
| 10～30 | ±0.20 |
| ～10 | ±0.15 |
| 角 度: | ±2° |
| 页 面: | 1 of 1 |

| | | | |
|---|---|---|---|
| 品 名: | 网络插座 | | |
| 料 号: | RJ45 网络接口 无灯无弹 (15.9) | | |
| 型 号: | RJ45 | 图 号: | |
| 版本: | 单位:mm | 比例: 1:1 | 纸张: A4 |

禁 止 在 图 面 上 随 意 涂 改